


# POLYKEN®

## 105C

### TRADESHOW FLOORING & BOOTH SETUP TAPE

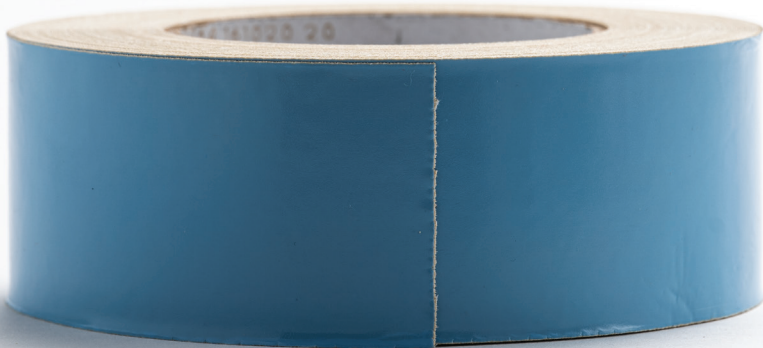

#### **Multipurpose Hold. Clean Surface Release.**

*Two-sided, tradeshow  
workhorse temporarily  
holds carpet, secures  
displays, and leaves no  
trace.*

#### **2X CleanTack bond.**

Dual-coated rubber adhesive provides high tack with clean release.

#### **Hand-tearable cloth.**

Flexible cloth backing tears easily and conforms to irregular floors and surfaces.

#### **Everyday mounting.**

Secures carpet, displays, and temporary fixtures in a single step.

#### **Clean surface release.**

Pulls away cleanly from specialty flooring and finished surfaces.


Field-tested brands.



# EVENT WORKHORSE: FLOORS AND DISPLAYS.

**Polyken® 105C** delivers reliable, double-sided hold for temporary setups. It is a multipurpose workhorse built with high-tack natural rubber adhesive on a flexible 11-mil cloth carrier.

Designed for convention carpet hold-down, booth installation, and general mounting, 105C keeps setups secure through active events and simplifies site cleanup.

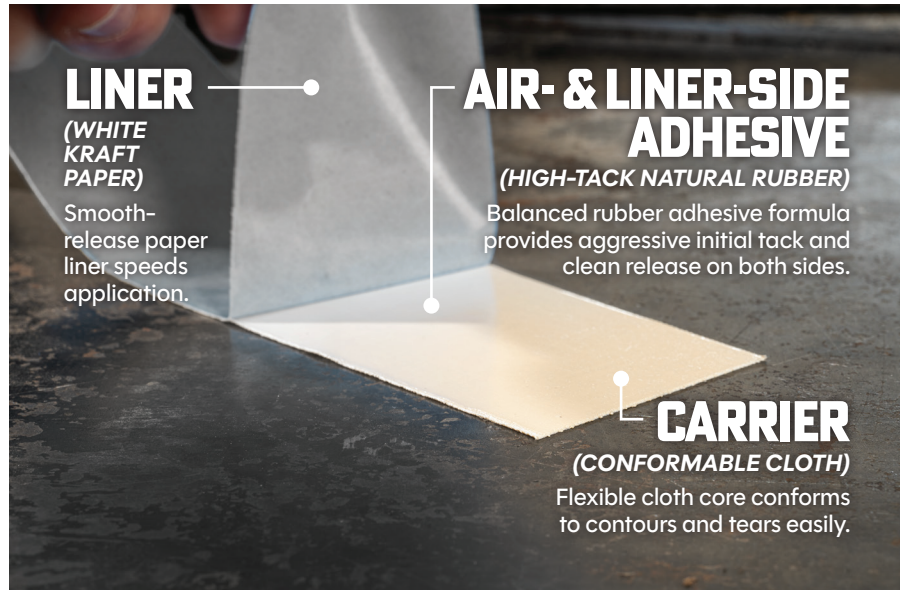

| FEATURES                                 |  | BENEFITS                                                   |  |
|------------------------------------------|--|------------------------------------------------------------|--|
| Standard-Tack Rubber Adhesive (40 oz/in) |  | High initial tack with clean removal from most surfaces.   |  |
| Cloth Carrier                            |  | Conforms to floor irregularities and tears easily by hand. |  |
| Low VOC Content (<1 g/L)                 |  | Satisfies LEED EQ Credit 4.1 for low-emitting materials.   |  |
| White Kraft Paper Liner                  |  | Smooth release for fast floor and booth setup.             |  |
| Clean Removal Formulation                |  | Removes cleanly from most surfaces and finishes.           |  |

| SPECIFICATIONS                  |                                                                                                                                                                                                                                                                                                               |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Carrier                         | Cloth                                                                                                                                                                                                                                                                                                         |
| Adhesive                        | Natural Rubber                                                                                                                                                                                                                                                                                                |
| Liner                           | White Kraft Paper                                                                                                                                                                                                                                                                                             |
| Total Thickness (ex. Liner)     | 11.0 mils (0.279 mm)                                                                                                                                                                                                                                                                                          |
| Adhesion to Steel               | 40 oz/in (4.38 N/cm)                                                                                                                                                                                                                                                                                          |
| Tensile Strength                | 20 lb/in (35.03 N/cm)                                                                                                                                                                                                                                                                                         |
| Operating Temperature           | 40°F to 200°F (4°C to 93°C)                                                                                                                                                                                                                                                                                   |
| VOC Content                     | Low VOC (<1 g/L)                                                                                                                                                                                                                                                                                              |
| Standard Roll Sizes & Packaging | 1 in x 36 yd (24 mm x 33 m)<br>24 rolls/case<br>1.88 in x 25 yd (48 mm x 23 m)<br>24 rolls/case<br>1.88 in x 36 yd (48 mm x 33 m)<br>16 rolls/case<br>2.83 in x 25 yd (72 mm x 23 m)<br>16 rolls/case<br>2.83 in x 36 yd (72 mm x 33 m)<br>16 rolls/case<br>2.83 in x 100 yd (72 mm x 91.4 m)<br>8 rolls/case |



A field-tested brand from Vybond • [vybond.com](http://vybond.com) • 1236\_09-26

The information presented herein was prepared at VYBOND GROUP, INC. (Vybond Group, Inc., 2320 Bowling Green Road, Franklin, KY 42134) by qualified technical personnel. To VYBOND's knowledge, it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use and that such use complies with all applicable federal, state, and local laws and regulations. The data are submitted only for the user's information and consideration and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose) or a representation for which VYBOND assumes any legal responsibility.