


POLYKEN® 3620A

Non-Woven Single-Coated Tape

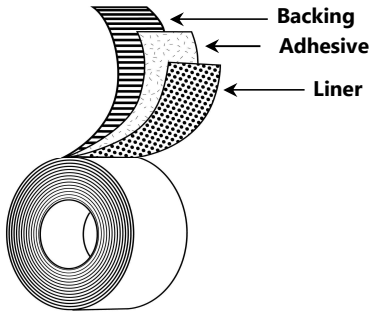

Backing:	2.2 oz/sy White Polyurethane Non-woven Fabric
Adhesive:	Medical-grade acrylic (M102)
Liner:	80lb super-calendared kraft, silicone release treated on both sides

Applications

- Medical device component
- Patient monitoring
- Medical device assembly
- Sensor components

Features

- PUR non-woven carrier
- Medical-grade Acrylic Adhesive
- 80lb Release Liner

Benefits

- Breathable for maximum patient comfort
- Highly conformable
- Designed for long-term wear applications
- Highly resistant to perspiration-borne moisture
- Easy to die-cut and convert

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Total Thickness w/o liner	9.7 mils	0.246 mm	PSTC 133
Adhesive Thickness	3.5 mils	0.089 mm	PSTC 133
Liner Thickness	4.2 mils	0.107 mm	PSTC 133
Adhesion to Steel	40 oz/in	4.38 N/cm	PSTC 101 Mod

Product Safety

The base adhesives in this medical product have been tested in accordance with ISO 10993 and found to be non-cytotoxic, non-irritating, and non-sensitizing.

Recommended Storage Conditions: 40-60% Humidity, 60°F-80°F

The information presented herein was prepared at VYBOND GROUP, INC. (Vybond Group, Inc. 2320 Bowling Green Road, Franklin, KY 42134) by qualified technical personnel. To VYBOND'S knowledge, it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state, and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which VYBOND assumes any legal responsibility.