


## Premium Gaffer's Tape

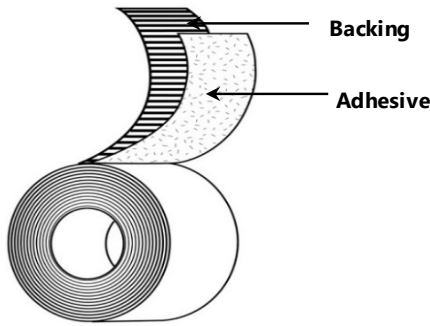

<b>Backing:</b>	Matte-Finish Vinyl Coated Cloth
<b>Adhesive:</b>	Rubber
<b>Liner:</b>	N/A
<b>Colors:</b>	Black, White, Gray, Brown, Red, Burgundy, Yellow, Dk Green, <b>Beige</b> , Navy, <b>Ral Yellow</b> , Neon Green, Neon Orange, Neon Yellow, Neon Pink, Neon Blue, Royal Blue, Purple, Teal
<b>Specifications:</b>	Tested in accordance with UL 723
<b>Standard Sizes:</b>	48mm x 50m, 72mm x 50m

### Applications

- |  |  |
|--|--|
| <ul style="list-style-type: none"> <li>• Protect and anchor wiring in the photography and film industry, convention, and hospitality</li> <li>• Place marking/spike tape</li> <li>• Vinyl seat repair</li> </ul> | <ul style="list-style-type: none"> <li>• Wrapping or bundling wire, metals, and plastics</li> <li>• Color Coding</li> <li>• General repair</li> <li>• Bookbinding</li> </ul> |
|--|--|

### Features

### Benefits

- |   |   |
|---|---|
| <ul style="list-style-type: none"> <li>• Heavy-Duty Vinyl-Coated Cloth Backing</li> <li>• Natural Rubber Adhesive</li> <li>• Low VOC Content</li> </ul> | <ul style="list-style-type: none"> <li>• Matte-finish for less reflectivity and low sheen</li> <li>• Excellent durability and conformability</li> <li>• High tack for a variety of surfaces</li> <li>• Clean removal - no residue</li> <li>• Can contribute toward satisfying EQ Credit 4.1 (Low Emitting Materials) under LEED®</li> </ul> |
|---|---|

### Typical Test Values

	Standard UOM	Metric UOM	Test Method
<b>Total Thickness</b>	11.5 mils	0.292 mm	ASTM D-1000
<b>Adhesion to Steel</b>	50 oz/in	5.47 N/cm	PSTC-101
<b>Adhesion to Backing</b>	29 oz/in	3.17 N/cm	PSTC-101
<b>Tensile Strength</b>	50 lb/in	87.56 N/cm	ASTM D-1000
<b>Operating Temperature</b>	40 to 200 °F	4 to 93 °C	
<b>Smoke Developed</b>	10		
<b>Flame Spread</b>	30		
<b>VOC Content</b>	<1 g/L		

Recommended Storage Conditions: 60-80 °F at 40-60% RH

Standard Shelf Life (at 25 °C): 12 months from date of manufacture.

The information presented herein was prepared at VYBOND GROUP, INC. (Vybond Group, Inc. 2320 Bowling Green Road, Franklin, KY 42134) by qualified technical personnel. To VYBOND'S knowledge, it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state, and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which VYBOND assumes any legal responsibility.