


General Purpose Electrical Tape

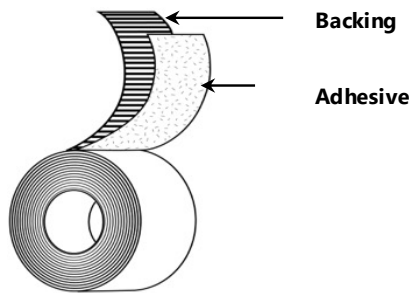

Backing:	PVC Film
Adhesive:	Rubber
Liner:	N/A
Colors:	Black
Specifications:	UL 510 Listed
Standard Sizes:	3/4" x 60Ft

Applications

- Wire splicing
- Wire insulation
- Spiral wrapping electrical wire and harnesses

Features

Benefits

- | | |
|---|---|
| <ul style="list-style-type: none"> • PVC Backing | <ul style="list-style-type: none"> • Stretchy and conformable for wrapping wires |
| <ul style="list-style-type: none"> • Rubber Adhesive | <ul style="list-style-type: none"> • Durable • Conformable |
| <ul style="list-style-type: none"> • UL 510 Listed | <ul style="list-style-type: none"> • Provides a strong long-term bond • No flagging or lifting • Meets requirements for most electrical applications |

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Total Thickness	7.0 mils	0.178 mm	ASTM D-1000
Adhesion to Steel	20 oz/in	2.19 N/cm	PSTC-101
Tensile Strength	18 lb/in	31.52 N/cm	ASTM D-1000
Elongation	200%		
Dielectric Strength	600V		
Operating Temperature	40 - 180 °F	4 - 82 °C	

Recommended Storage Conditions: 60-80 °F at 40-60% RH
 Standard Shelf Life (at 25 °C): 12 months from date of manufacture.

The information presented herein was prepared at VYBOND GROUP, INC. (Vybond Group, Inc. 2320 Bowling Green Road, Franklin, KY 42134) by qualified technical personnel. To VYBOND'S knowledge, it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state, and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which VYBOND assumes any legal responsibility.