


## FlexFix<sup>®</sup> UL 181B-FX Listed Film Tape

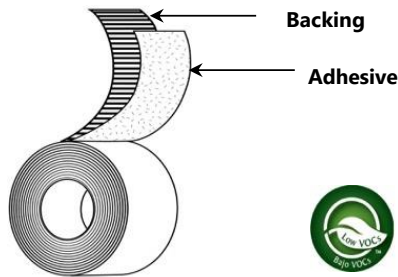

Backing:	Printed OPP Film
Adhesive:	Acrylic
Liner:	N/A
Colors:	Metallic & Black
Specifications:	UL 181B-FX Listed
Standard Sizes:	48mm x 110M, 72mm x 110M

### Applications

- Tough, contractor grade closure system for UL Listed flexible, non-metallic air duct
- Sealing reflective and bubble insulation
- Suitable for metal to metal connections in HVAC and refrigeration applications
- Dryer vent and bath fan duct sealing

### Features

- OPP Backing
- Acrylic Adhesive
- UL 181B-FX Listed
- Low VOC Content

### Benefits

- Tough and durable
- Hand tearable for ease of use
- High visibility print (red on metallic, white on black) for easy inspection
- Solvent-free, low odor
- Aggressive, high tack bond
- Mold and moisture resistant
- Meets code requirements and can contribute toward requirements for EA Credit 1 (Optimize Energy Performance) under LEED<sup>®</sup>
- Can contribute toward satisfying EQ Credit 4 (Low Emitting Materials) under LEED<sup>®</sup>

### Typical Test Values

	Standard UOM	Metric UOM	Test Method
Total Thickness	3.1 mils	0.079 mm	ASTM D-1000
Adhesion to Steel	45 oz/in	4.92 N/cm	PSTC-101
Adhesion to Backing	35 oz/in	3.83 N/cm	PSTC-101
Tensile Strength	34 lb/in	59.54 N/cm	ASTM D-1000
Operating Temperature	-40 to 212 °F	-40 to 100 °C	
VOC Content	0 g/L		

Recommended Storage Conditions: 60-80 °F at 40-60% RH  
 Standard Shelf Life (at 25 °C): 24 months from date of manufacture.

The information presented herein was prepared at VYBOND GROUP, INC. (Vybond Group, Inc. 2320 Bowling Green Road, Franklin, KY 42134) by qualified technical personnel. To VYBOND'S knowledge, it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state, and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which VYBOND assumes any legal responsibility.