


# Ludlow Tape® M-Tak® 0234

## Polyester Supported Double-Coated Tape

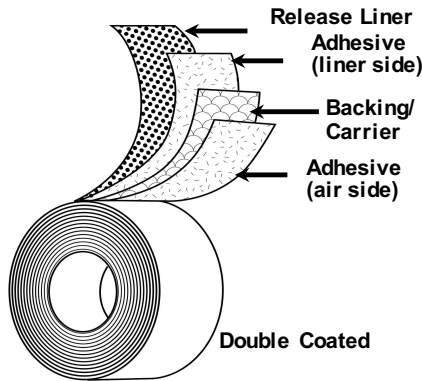

**Carrier:** Polyester Film

**Adhesive:** Synthetic Rubber (HM804)

**Liner:** 54# SC Kraft with Finger-Lift Edge™

### Product Constructions Available

| Number | TW | TL    | AW    |
|--------|----|-------|-------|
| 0234   | 1" | 2000' | 0.75" |

### Applications

- Lightweight corrugated mailer sealing
- Permanent sign and poster mounting
- SBS chipboard packaging seals
- Point-of-sale displays

### Features

- Synthetic Rubber Adhesive
- PET Film Carrier
- Finger-lift Edge Liner

### Benefits

- High adhesion for a secure permanent bond to plastics, papers and mailers
- Strong initial tack
- Provides support and structure for added stability
- Conformable
- Easy to start, easy to use

### Typical Test Values

|                                       | Standard UOM  | Metric UOM   | Test Method  |
|---------------------------------------|---------------|--------------|--------------|
| <b>Tape Thickness (w/o liner)</b>     | 6.4 mils      | 0.163 mm     | PSTC 133     |
| <b>Liner Thickness</b>                | 3.2 mils      | 0.081 mm     | PSTC 133     |
| <b>Overall Thickness</b>              | 9.6 mils      | 0.244 mm     | PSTC 133     |
| <b>Adhesion to Steel (Air Side)</b>   | 80 oz/in      | 8.75 N/cm    | PSTC 101 Mod |
| <b>Adhesion to Steel (Liner Side)</b> | 90 oz/in      | 9.85 N/cm    | PSTC 101 Mod |
| <b>Application Temperature Range</b>  | 40 to 105 °F  | 4 to 40 °C   |              |
| <b>Operating Temperature Range</b>    | -20 to 160 °F | -29 to 71 °C |              |

Recommended Storage Conditions: 60-80 °F at 40-60% RH  
 Standard Shelf Life (at 25 °C): 36 months from date of manufacture.

The information presented herein was prepared at VYBOND GROUP, INC. (Vybond Group, Inc. 2320 Bowling Green Road, Franklin, KY 42134) by qualified technical personnel. To VYBOND'S knowledge, it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state, and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which VYBOND assumes any legal responsibility.