


# POLYKEN®

# 360-35

## Foilastic<sup>®</sup> Butyl/Foil Sealing Tape

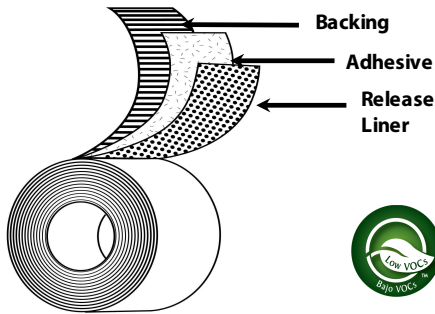

**Backing:** 2 mil Aluminum Foil

**Adhesive:** Butyl Rubber

**Liner:** Blue LDPE

**Colors:** Aluminum

**Standard Sizes:** 48mm x 15M, 3" x 50Ft, 4" x 50Ft

### Applications

- Duct joint sealing for low, medium, and high pressure HVAC systems
- Window and door flashing
- Repairs in aluminum siding, sheet metal, gutters, storage buildings, flashing, containers, and more
- Sealing roof alleys, eaves, hips and ridges

### Features

- Aggressive butyl mastic adhesive
- Conformable foil backing
- Low VOC Content

### Benefits

- Provides instant water and air-tight seal
- Resistant to moisture and solvents
- Permanent repairs
- Easy to use in tight spaces
- Conforms easily to round, square, or odd-shaped objects
- Can contribute toward satisfying EQ Credit 4.1 (Low Emitting Materials) under LEED®

### Typical Test Values

	Standard UOM	Metric UOM	Test Method
<b>Total Thickness</b>	35.0 mils	0.889 mm	ASTM D-1000
<b>Foil Thickness</b>	2.0 mils	0.051 mm	ASTM D-1000
<b>Adhesion to Steel</b>	160 oz/in	17.50 N/cm	PSTC-101
<b>Tensile Strength</b>	20 lb/in	35.03 N/cm	ASTM D-1000
<b>Operating Temperature</b>	40 to 200 °F	4 to 93 °C	
<b>VOC Content</b>	<1 g/L		

Recommended Storage Conditions: 60-80 °F at 40-60% RH  
Standard Shelf Life (at 25 °C): 36 months from date of manufacture.

The information presented herein was prepared at VYBOND GROUP, INC. (Vybond Group, Inc. 2320 Bowling Green Road, Franklin, KY 42134) by qualified technical personnel. To VYBOND'S knowledge, it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state, and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which VYBOND assumes any legal responsibility.



2320 Bowling Green Road | Franklin, KY 42134  
1-800-343-7875 Fax 1-800-328-4822  
www.vybond.com  
5/29/18