


Utility Grade Filament Tape

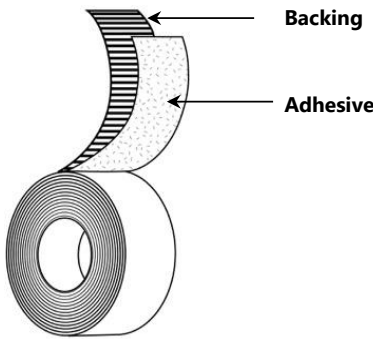

Backing:	Fiberglass-Reinforced Polypropylene Film
Adhesive:	Synthetic Rubber
Liner:	N/A
Colors:	Transparent
Specifications:	N/A
Standard Sizes:	12mm x 55M, 18mm x 55M, 24mm x 55M

Applications

- General purpose strapping tape for light-duty applications
- Pallet and corrugate strapping
- Package and box sealing
- Bundling and wrapping

Features

- Mono-Directional Filament Reinforcement
- Rubber Adhesive

Benefits

- High strength
- Durable
- Provides a strong long-term bond
- No flagging or lifting

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Total Thickness	4.5 mils	0.114 mm	ASTM D-1000
Adhesion to Steel	90 oz/in	9.85 N/cm	PSTC-101
Tensile Strength	110 lb/in	192.64 N/cm	ASTM D-1000
Elongation	6%		
Operating Temperature	-22 to 130 °F	-30 to 55 °C	

Recommended Storage Conditions: 60-80 °F at 40-60% RH
 Standard Shelf Life (at 25 °C): 24 months from date of manufacture.

The information presented herein was prepared at VYBOND GROUP, INC. (Vybond Group, Inc. 2320 Bowling Green Road, Franklin, KY 42134) by qualified technical personnel. To VYBOND'S knowledge, it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state, and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which VYBOND assumes any legal responsibility.