


Lusterless Military Grade Duct Tape

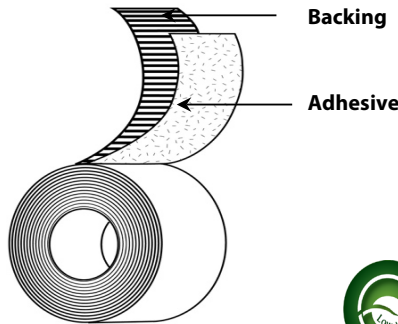

- Backing:** Lusterless PE Coated Cloth
- Adhesive:** Rubber
- Liner:** N/A
- Colors:** Olive Drab, Black, White, Green, Red
- Specifications:** ASTM D -5486 Type IV Class 1
- Standard Sizes:** Call for Sizes

Applications

- Waterproof packaging for military and aerospace applications
- Media-blast and surface protection
- Challenging repair, bundling, and seaming applications

Features

- PE-Coated Cloth Backing
- Natural Rubber Based Adhesive

Benefits

- High tensile strength for difficult applications
- Extremely conformable
- Crisp, straight tear
- Lusterless, non-reflective finish for less-visible repairs
- Moisture, solvent, and abrasion resistant
- Aggressive adhesion to all surfaces
- Low VOC content

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Total Thickness	12.0 mils	0.305 mm	ASTM D-1000
Adhesion to Steel	60 oz/in	6.56 N/cm	PSTC-101
Adhesion to Backing	35 oz/in	3.83 N/cm	PSTC-101
Tensile Strength	55 lb/in	96.32 N/cm	ASTM D-1000
Operating Temperature	40 to 200 °F	4 to 93 °C	

Recommended Storage Conditions: 60-80 °F at 40-60% RH
 Standard Shelf Life (at 25 °C): 36 months from date of manufacture.

The information presented herein was prepared at VYBOND GROUP, INC. (Vybond Group, Inc. 2320 Bowling Green Road, Franklin, KY 42134) by qualified technical personnel. To VYBOND'S knowledge, it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state, and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which VYBOND assumes any legal responsibility.