


POLYKEN®

360-17

Foilmastic® Butyl/Foil Sealing Tape

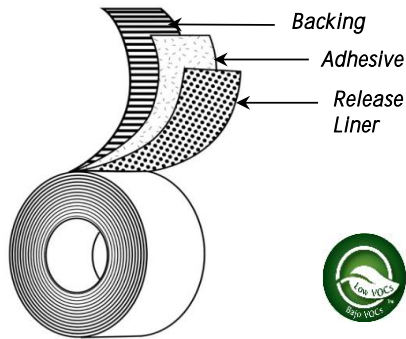

- Backing: 2 mil Aluminum Foil - Printed
Adhesive: Butyl Rubber
Liner: Blue LDPE
Colors: Printed Aluminum
Specifications: UL 723 Classified and tested in accordance with CAN/ULC-S102-10
Standard Sizes: 2in x 33.3yd, 3in x 33.3yd

Applications

- Duct joint sealing for low, medium, and high pressure HVAC systems
- Repairs in aluminum siding, sheet metal, gutters, storage buildings, flashing, containers, greenhouses, and more

Features

- Aggressive butyl mastic adhesive
- Conformable foil backing
- Low VOC Content

Benefits

- Provides instant water and air-tight seal
- Resistant to moisture and solvents
- Permanent repairs
- Easy to use in tight spaces
- Conforms easily to round, square, or odd-shaped objects
- Can contribute toward satisfying EQ Credit 4.1 (Low Emitting Materials) under LEED®

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Total Thickness	17.0 mils	0.432 mm	ASTM D-1000
Foil Thickness	2.0 mils	0.051 mm	ASTM D-1000
Adhesion to Steel	200 oz/in	21.88 N/cm	PSTC-101
Tensile Strength	20 lb/in	35.03 N/cm	ASTM D-1000
Flame Spread	5		UL 723 & CAN/ULC-S102-10
Smoke Developed	10		UL 723 & CAN/ULC-S102-10
Operating Temperature	-20 to 200 °F	-28 to 93 °C	
VOC Content	<1 g/L		

Recommended Storage Conditions: 60-80 °F at 40-60% RH
Standard Shelf Life (at 25 °C): 36 months from date of manufacture.

The information presented herein was prepared at VYBOND GROUP, INC. (Vybond Group, Inc. 2320 Bowling Green Road, Franklin, KY 42134) by qualified technical personnel. To VYBOND'S knowledge, it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state, and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which VYBOND assumes any legal responsibility.



2320 Bowling Green Road | Franklin, KY 42134
1-800-343-7875 Fax 1-800-328-4822
www.vybond.com
4/8/2022