




# 1676

## High Temp PVC Fineline Masking Tape

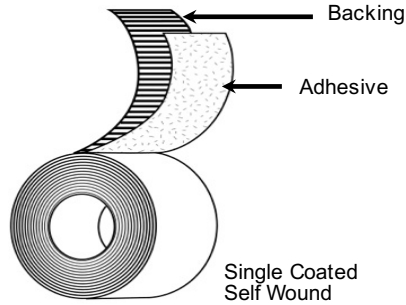

<b>Backing:</b>	PVC Film
<b>Adhesive:</b>	Rubber (R405)
<b>Liner:</b>	N/A
<b>Colors:</b>	Light Blue (Low Gloss)
<b>Specifications:</b>	N/A
<b>Size Options:</b>	Incremental sizes 0.118" - 47.5" x 108Ft

### Applications

- Masking color separations on plastic (TPO & RIM) automotive fascia, trim, and finished metals in high temp OEM bake cycles (280 °F for 45 min)\*
- Aircraft paint operations
- OEM paint line powerwash cycles
- Clean room paint masking

### Features

- PVC Film Backing
- Rubber Based Adhesive
- Clean-cut Plastic Core

### Benefits

- Tough and conformable
- Translucent for easy application and inspection
- Moisture and solvent resistant
- Crisp, fineline edge
- Printable and die-cuttable
- Good high temperature performance
- Stain and ghosting resistant
- Recyclable and clean - no dust or contaminants

### Typical Test Values

	Standard UOM		Metric UOM		Test Method
<b>Total Thickness</b>	5.5	mils	0.140	mm	PSTC-133
<b>Substrate Thickness</b>	4	mils	0.102	mm	PSTC-133
<b>Adhesion to Steel</b>	24	oz/in	2.63	N/cm	ASTM D-3330
<b>Tensile Strength</b>	16	lb/in	28.02	N/cm	ASTM D-3759
<b>Elongation</b>	110%				
<b>Application Temperature</b>	60 to 120 °F		16 to 49 °C		
<b>Operating Temperature</b>	40 to 280 °F		4.4 to 138 °C		

\*Room temperature demask recommended  
 Recommended Storage Conditions: 40-60% Humidity, 60 - 80 °F  
 Standard Shelf Life (at 25 °C): 12 months from shipment date

The information presented herein was prepared at BERRY GLOBAL, INC. (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry Global's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.



25 Forge Pkwy Franklin, MA 02038  
 1-800-343-7875 Fax 1-800-328-4822  
 www.berryglobal.com  
 8/9/18