


Heavy-Duty Protective Film Tape - Removable

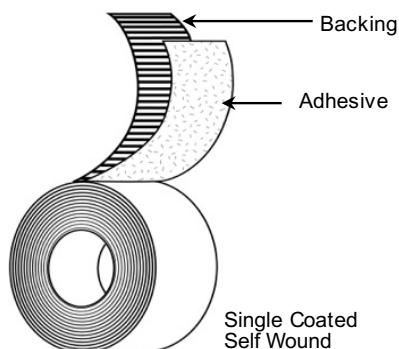

Backing:	LDPE Film
Adhesive:	Acrylic (A200)
Liner:	Self Wound or with 53# Clay Coated Kraft
Colors:	Clear
Specifications:	N/A
Size Options:	Incremental widths 1/4" - 48" x 180ft

Applications

- Protective masking on plastics and metals during shipping and assembly - saves money by reducing damage to delicate surfaces!
- Surface and label overlaminates

Features

- LDPE Film
- Acrylic Adhesive

Benefits

- Thick and tough
- Solvent, chemical, and moisture resistant
- Abrasion resistant
- Moderate tack - bonds to most surfaces
- Removes cleanly from most surfaces
- Easy to apply

Typical Test Values

	Standard UOM		Metric UOM		Test Method
Total Thickness	8.0	mils	0.203	mm	PSTC-133
Substrate Thickness	7.0	mils	0.178	mm	PSTC-133
Adhesion to Steel	10	oz/in	1.09	N/cm	ASTM D-3330
Tensile Strength	16	lb/in	28.02	N/cm	ASTM D-3759
Elongation	600%				
Application Temperature	50 to 120 °F		10 to 49 °C		
Operating Temperature	-40 to 190 °F		-40 to 88 °C		

Recommended Storage Conditions: 40-60% Humidity, 60 - 80 °F

Standard Shelf Life (at 25 °C): 12 months from shipment date

The information presented herein was prepared at VYBOND GROUP, INC. (Vybond Group, Inc. 2320 Bowling Green Road, Franklin, KY 42134) by qualified technical personnel. To VYBOND'S knowledge, it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state, and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which VYBOND assumes any legal responsibility.