


Acrylic Joist Tape

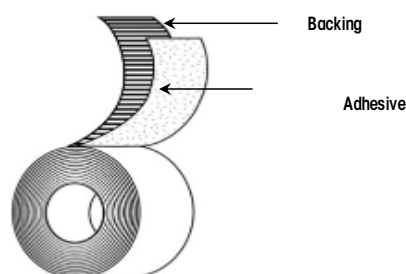

Backing:	Polypropylene (printed and unprinted)
Adhesive:	Acrylic
Colors:	Black
Specification:	Passes AAMA 711-22 Section 5.2 Water Penetration Around Fasteners
Standard Sizes:	2in x 50ft, 4in x 50ft, 12in x 50ft

Applications

- Protect top of deck joists, rim boards and ledgers

Features

- Polypropylene Backing
- Acrylic Adhesive
- Self-Wound Construction

Benefits

- Excellent conformability for bonding around curves and corners
- Pinned/serrated edge for tearability
- Durable and strong
- Excellent cold-temperature adhesion
- Excellent adhesion to variety of substrates
- Provides permanent weather-tight seal on most clean, dry building surfaces
- Self-healing after puncture
- Less jobsite waste
- Faster installations

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Total Thickness	9.5 mils	0.241 mm	ASTM D-1000
Adhesion to OSB	153 oz/in	16.70 N/cm	ASTM D3330 Method F
Adhesion to Aluminum	144 oz/in	15.76 N/cm	ASTM D3330 Method F
Adhesion to Dry Pressure Treated Wood	132 oz/in	14.40 N/cm	ASTM D3330 Method F
Adhesion to Plywood	133 oz/in	14.54 N/cm	ASTM D3330 Method F
Adhesion to Backing	38 oz/in	4.20 N/cm	ASTM D3330 Method F
Tensile Strength	25 lb/in	44.50 N/cm	ASTM D3759 Procedure A
Elongation	820%		ASTM D3759 Procedure A
Installation Temperature	20 to 180 °F	-7 to 82 °C	
Operating Temperature	-30 to 200 °F	-34 to 93 °C	
UV Exposure	1 year		

Recommended Storage Conditions: 60-80 °F at 40-60% RH

Standard Shelf Life (at 25 °C): 36 months from date of manufacture.

The information presented herein was prepared at VYBOND GROUP, INC. (Vybond Group, Inc. 2320 Bowling Green Road, Franklin, KY 42134) by qualified technical personnel. To VYBOND'S knowledge, it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state, and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which VYBOND assumes any legal responsibility.