


Super Premium Duct Tape

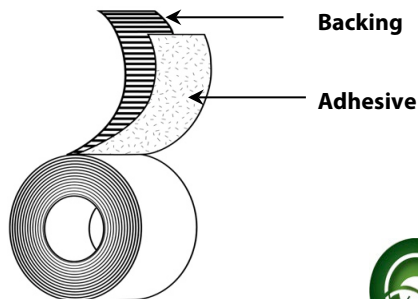

- Backing:** PE Coated Cloth
- Adhesive:** Rubber
- Liner:** N/A
- Colors:** Black
- Standard Sizes:** 48mm x 36M

Applications

- Sealing and patching bottom board materials for manufactured housing
- Heavy-duty contractor and manufacturing uses
- Media-blast protection
- Seaming and sealing for heavy PE sheeting and tarps

Features

- PE-Coated Cloth Backing
- Natural Rubber Adhesive
- Low VOC Content

Benefits

- High tensile strength for difficult applications
- Puncture and abrasion resistant
- Crisp, straight tear
- Moisture, solvent, and abrasion resistant
- Aggressive adhesion to all surfaces
- Excellent long term bond
- Can contribute toward satisfying EQ Credit 4.1 (Low Emitting Materials) under LEED®

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Total Thickness	16.0 mils	0.406 mm	ASTM D-1000
Adhesion to Steel	110 oz/in	12.03 N/cm	PSTC-101
Tensile Strength	48 lb/in	84.06 N/cm	ASTM D-1000
Operating Temperature	40 to 200 °F	4 to 93 °C	
VOC Content	<1 g/L		

Recommended Storage Conditions: 60-80 °F at 40-60% RH
 Standard Shelf Life (at 25 °C): 36 months from date of manufacture.

The information presented herein was prepared at VYBOND GROUP, INC. (Vybond Group, Inc. 2320 Bowling Green Road, Franklin, KY 42134) by qualified technical personnel. To VYBOND'S knowledge, it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state, and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which VYBOND assumes any legal responsibility.