


## Utility Grade Masking Tape

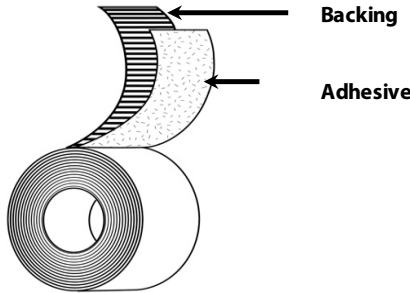

**Backing:** Crepe Paper

**Adhesive:** Rubber

**Liner:** N/A

**Colors:** Natural

**Specifications:** N/A

**Standard Sizes:** 18mm x 55M, 24mm x 55M, 36mm x 55M, 48mm x 55M

### Applications

- General purpose masking tape for the building and paint industry
- Ideal for home paint masking applications
- Light bundling, packaging, and labelling

### Features

- Crepe Paper Backing
- Rubber Adhesive

### Benefits

- Hand Tearable
- Conformable
- Holds up to most paints and other moisture
- Good bond to most surfaces
- Clean removal for up to 1-3 days

### Typical Test Values

	Standard UOM	Metric UOM	Test Method
<b>Total Thickness</b>	4.8 mils	0.122 mm	ASTM D-1000
<b>Adhesion to Steel</b>	42 oz/in	4.59 N/cm	PSTC-101
<b>Tensile Strength</b>	16 lb/in	28.02 N/cm	ASTM D-1000
<b>Elongation</b>	8%		
<b>Operating Temperature</b>	40 to 150 °F	4 to 65 °C	

Recommended Storage Conditions: 60-80 °F at 40-60% RH  
 Standard Shelf Life (at 25C): 12 months from date of manufacture.

The information presented herein was prepared at VYBOND GROUP, INC. (Vybond Group, Inc. 2320 Bowling Green Road, Franklin, KY 42134) by qualified technical personnel. To VYBOND'S knowledge, it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state, and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which VYBOND assumes any legal responsibility.