


629

Seam & Seal™ Contractor Grade Sheathing Tape

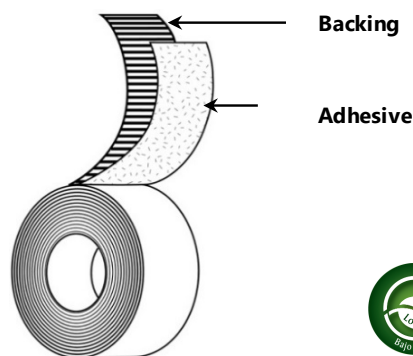

Backing: BOPP Film
Adhesive: Acrylic
Liner: N/A
Colors: Red, White, Clear
Specifications: N/A
Standard Sizes: 48mm x 50M, 72mm x 50M

Applications

- Sealing and seaming joints and overlaps in housewrap and interior/exterior vapor barriers
- Sealing exterior wall sheathing joints and extruded foam products
- Sealing window and door flanges or frames
- Patching jobsite damage caused to wall sheathing and housewraps

Features

- BOPP Backing
- Acrylic Adhesive
- Low VOC Content

Benefits

- Tough and durable
- Hand tearable for ease of use
- UV Resistant for outdoor installations up to 180 days
- Aggressive bond - won't flag or lift
- Mold and moisture resistant
- Performs well in cold temperatures as well as high heat and high humidity conditions
- Can contribute toward satisfying EQ Credit 4.1 (Low Emitting Materials) under LEED®

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Total Thickness	3.2 mils	0.081 mm	ASTM D-1000
Adhesion to Steel	65 oz/in	7.11 N/cm	PSTC-101
Tensile Strength	32 lb/in	56.04 N/cm	ASTM D-1000
Application Temperature	-5 to 180 °F	-20 to 82 °C	
Operating Temperature	-40 to 212 °F	-40 to 100 °C	

Recommended Storage Conditions: 60-80 °F at 40-60% RH

Standard Shelf Life (at 25 °C): 24 months from date of manufacture.

The information presented herein was prepared at VYBOND GROUP, INC. (Vybond Group, Inc. 2320 Bowling Green Road, Franklin, KY 42134) by qualified technical personnel. To VYBOND'S knowledge, it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state, and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which VYBOND assumes any legal responsibility.



2320 Bowling Green Road | Franklin, KY 42134
1-800-343-7878 Fax 1-800-328-4822
www.vybond.com
4/13/26