


# APB-292

## Double-Coated Foam Tape

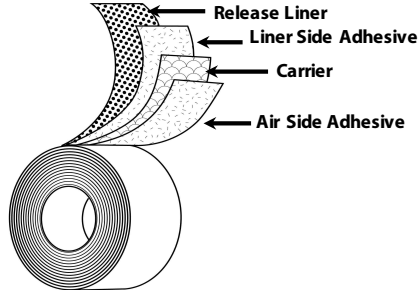

- Liner:** 4 mil Blue PP
- Liner Side Adhesive:** Acrylic (I636)
- Backing/Carrier:** 1/16" 4lb Closed-Cell, Crosslinked Black PE Foam
- Air Side Adhesive:** Acrylic (I636)

Note: Same product is also available on **White** color foam as **APW-292**

### Applications

- Seal against air, moisture, light, and dust
- Bonding Irregular Surfaces, Cushioning
- Insulates in thermal and sound deadening
- For use with molded and extruded plastics
- Shock & Vibration Absorbance, gap filling
- Automotive Interior Applications

### Features

- Acrylic Adhesive
- Foam Carrier
- PE Film Liner

### Benefits

- Moderate tack
- Excellent shear strength and adhesion
- Good quick stick
- Bonds to a variety of substrates
- Conformable
- Minimal moisture absorption
- Foam die-cuts cleanly and easily
- Lends itself to die-cutting and kiss cuts

### Typical Test Values

	Standard UOM	Metric UOM	Test Method
<b>Overall Thickness (w/liner)</b>	70.5 mils	1.791 mm	PSTC 133
<b>Air-Side Adhesive Thickness</b>	2.0 mils	0.051 mm	PSTC 133
<b>Carrier Thickness</b>	62.5 mils	1.588 mm	PSTC 133
<b>Liner Side Adhesive Thickness</b>	2.0 mils	0.051 mm	PSTC 133
<b>Liner Thickness</b>	4.0 mils	0.102 mm	PSTC 133
<b>Adhesion to Steel (Air Side)</b>	N/A*		PSTC 101 Mod
<b>Shear Strength</b>	>7 Days		PSTC 107 Mod
<b>Laminating Temperature</b>	68 to 100 °F	20 to 38 °C	
<b>Service Temperature</b>	-30 to 220 °F	-34 to 104 °C	

\* Adhesive peel strength supercedes cohesive strength of the foam carrier.

Recommended Storage Conditions: 40-60% Humidity, 60 °F - 80 °F

Standard Shelf Life: 12 months from date of shipment

The information presented herein was prepared at VYBOND GROUP, INC. (Vybond Group, Inc. 2320 Bowling Green Road, Franklin, KY 42134) by qualified technical personnel. To VYBOND'S knowledge, it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state, and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which VYBOND assumes any legal responsibility.