


Utility Grade Pipewrap Tape

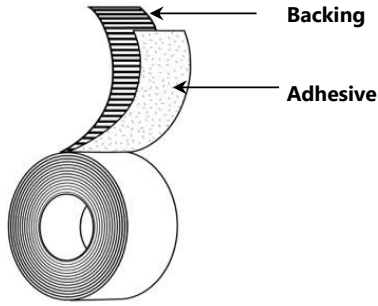

- Backing: Printed PVC Film
- Adhesive: Rubber Based
- Liner: N/A
- Colors: Black
- Specifications: Meets UPC, ANSI & IAPMO standards
- Standard Sizes: 48mm x 31M

Applications

- Under and above-ground pipe wrap applications
- Industrial assembly
- Protecting metal pipes and parts against mechanical and chemical wear

Features

- PVC Film Backing
- Rubber Adhesive

Benefits

- Tough and conformable
- Protects against UV, moisture, acids, alkalides, abrasion, and corrosion
- Provides a strong long-term bond
- No flagging or lifting

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Total Thickness	10 mils	0.254 mm	ASTM D-1000
Adhesion to Steel	15 oz/in	1.64 N/cm	PSTC-101
Tensile Strength	20 lb/in	35.03 N/cm	ASTM D-1000
Elongation	100%		
Operating Temperature	0 to 200 °F	-18 to 93 °C	

Recommended Storage Conditions: 60-80 °F at 40-60% RH
 Standard Shelf Life (at 25 °C): 5 years from date of manufacture.

The information presented herein was prepared at VYBOND GROUP, INC. (Vybond Group, Inc. 2320 Bowling Green Road, Franklin, KY 42134) by qualified technical personnel. To VYBOND'S knowledge, it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state, and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which VYBOND assumes any legal responsibility.