


Foilastic® Roof Flashing Tape

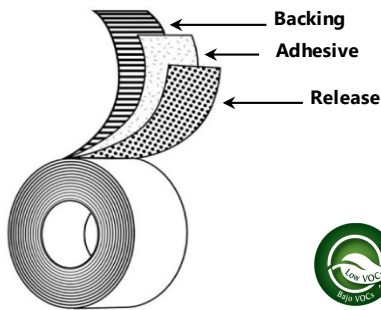

| | |
|------------------------|--|
| Backing: | 2 mil Aluminum Foil |
| Adhesive: | Butyl Rubber |
| Liner: | LDPE Film |
| Colors: | Aluminum |
| Specifications: | AAMA-711-22, ASTM E2112 15 Year Limited Warranty |
| Standard Sizes: | 48mm x 15M, 3in x 50ft, 4in x 50ft, 6in x 50ft, 9" x 50ft, 36" x 50ft, 12" x 50ft |

Applications

- Flashing hip, ridge, and penetration details on concrete tile roofs
- Sealing gutters, roof valleys and eaves, chimneys and vents, and rooftop duct systems
- Deck-to-wall joints
- Sheet metal repairs on mobile homes, trailers
- Sealing other detail areas against water and air penetration

Features

- 2 mil Aluminum Foil Backing
- Premium Butyl Rubber Adhesive
- LDPE Liner

Benefits

- Conformable and durable
- Excellent air and moisture barrier properties
- Suitable for indefinite outdoor UV exposure
- Provides permanent weather-tight seal on most clean, dry building surfaces
- Excellent all-temperature performance
- Compatible with sealants and caulking
- Self-healing after puncture
- Used properly, can contribute toward requirements for EA Credit 1 (Optimize Energy Performance) under LEED®
- Easy to use
- Moisture resistant

Typical Test Values

| | Standard UOM | Metric UOM | Test Method |
|---------------------------------|---------------|--------------|------------------------|
| Total Thickness | 35.0 mils | 0.889 mm | ASTM D-1000 |
| Adhesion to Aluminum | 323 oz/in | 35.38 N/cm | ASTM D3330 Method F |
| Adhesion to Plywood | 138 oz/in | 15.06 N/cm | ASTM D3330 Method F |
| Adhesion to OSB | 115 oz/in | 12.61 N/cm | ASTM D3330 Method F |
| Adhesion to PVC | 40 oz/in | 4.38 N/cm | ASTM D3330 Method F |
| Adhesion to Backing | 126 oz/in | 13.83 N/cm | ASTM D3330 Method F |
| Tensile Strength | 24 lb/in | 42.38 N/cm | ASTM D3759 Procedure A |
| Installation Temperature | 30 to 180 °F | -1 to 82 °C | |
| Operating Temperature | -30 to 200 °F | -34 to 93 °C | |

Recommended Storage Conditions: 60-80 °F at 40-60% RH

Standard Shelf Life (at 25 °C): 36 months from date of manufacture.

The information presented herein was prepared at VYBOND GROUP, INC. (Vybond Group, Inc. 2320 Bowling Green Road, Franklin, KY 42134) by qualified technical personnel. To VYBOND'S knowledge, it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state, and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which VYBOND assumes any legal responsibility.