


ASJ-WMP Seaming Tape

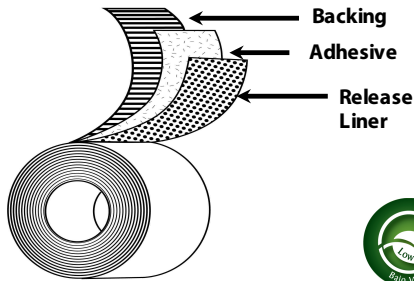

- Backing:** White OPP/Scrim/Foil Laminate
- Adhesive:** Acrylic
- Liner:** Polycoated Natural Kraft Paper
- Colors:** White
- Specifications:** Tested in accordance with UL 723
- Standard Sizes:** 72mm x 46M

Applications

- Vapor barrier seal for WMP-faced industrial insulation and thermal jacketing
- Sealing insulation and repairing in cooler/refrigeration applications

Features

- White Metallized OPP Film/Scrim/Kraft Facer
- Acrylic Adhesive
- Low VOC Content

Benefits

- High strength and tear resistant
- Excellent air barrier properties
- Mold resistant
- Low odor adhesive
- Super high tack, aggressive bond to surfaces
- Excellent low or high temperature performance
- Can contribute toward satisfying EQ Credit 4.1 mold resistant

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Total Thickness	8.8 mils	0.224 mm	ASTM D-1000
Adhesion to Steel	50 oz/in	5.47 N/cm	PSTC-101
Tensile Strength	45 lb/in	78.81 N/cm	ASTM D-1000
Operating Temperature	-35 to 260 °F	-37 to 126 °C	
Smoke Developed	0		
Flame Spread	0		
VOC Content	<1 g/L		

Recommended Storage Conditions: 60-80 °F at 40-60% RH
 Standard Shelf Life (at 25 °C): 36 months from date of manufacture.

The information presented herein was prepared at VYBOND GROUP, INC. (Vybond Group, Inc. 2320 Bowling Green Road, Franklin, KY 42134) by qualified technical personnel. To VYBOND'S knowledge, it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state, and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which VYBOND assumes any legal responsibility.