


Halogen-Free Wire Harness Tape

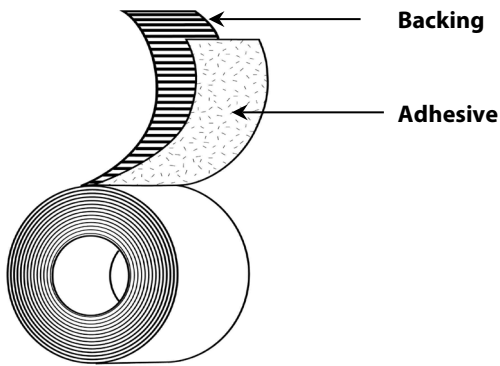

Backing: Polymeric Composite
Adhesive: Black Blended Rubber
Temp. Resistance: 85 °C (continuous)
Colors: Gray
Standard Sizes: 3/4"x100ft, 1"x100ft
Specifications: Ford Perf. ES-AC3T-1A303-AA(A10-00)
 DaimlerChrysler MS-CH71 Type B
 RoHS Compliant

Applications

- Instrument panel and other interior wire harness wrapping
- Noise and squeak reduction
- Spot taping, clip retention or continuous wrap

Features

- Composite Backing
- Rubber adhesive

Benefits

- Easy tear and application
- Excellent conformability for wrapping
- Consistent unwind
- High adhesion
- Resistant to typical automotive fluids
- Low VOC and Halogen Free

Typical Test Values

	Standard UOM		Metric UOM		Test Method
Total Thickness	8.0	mils	0.203	mm	ASTM D-1000
Adhesion to Steel	45	oz/in	4.92	N/cm	PSTC-1
Adhesion to Backing	25	oz/in	2.74	N/cm	PSTC-1
Tensile Strength	20	lb/in	35.00	N/cm	ASTM D-1000
Unwind Force	30	oz/in	3.28	N/cm	PSTC-8
Elongation	10%				ASTM D-1000
Resistance to Typical Auto Fluids					
Room Temperature	Pass				
Elevated Temperatures	Pass				
Temperature Rating	85 °C				
Shelf Life at 25 °C	24 Months				

Recommended Storage Conditions: 40-60% Humidity, 60 °F - 80 °F