


POLYKEN® 3395A

Flexible Film Tape

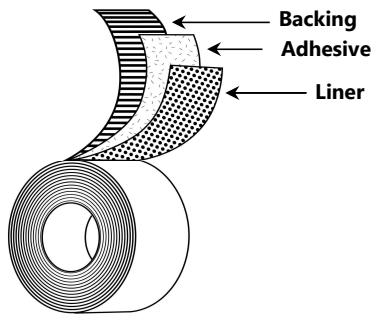

Backing:	1 mil white BOPP film
Adhesive:	Medical-grade Rubber (M117)
Liner:	60lb bleached super-calendered kraft, silicone coated on both sides

Applications

- Mounting and laminating electronic component
- Medical device component
- Patient monitoring
- Medical device assembly
- Sensor components
- Pulse oximetry

Features

- BOPP Film Backing
- Rubber Adhesive
- 60lb Release Liner

Benefits

- Acts as a light block for light-sensitive devices
- Flexible and conformable
- High tack bonds well to various materials
- Easy to die-cut and convert

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Total Thickness w/liner	6.4 mils	0.163 mm	PSTC 133
Adhesive Thickness	1.8 mils	0.046 mm	PSTC 133
Carrier Thickness	1.0 mils	0.025 mm	PSTC 133
Liner Thickness	3.6 mils	0.091 mm	PSTC 133
Adhesion to Steel	150 oz/in	16.41 N/cm	PSTC 101 Mod
Liner Release	76 g/in	0.29 N/cm	ASTM D-5375

Product Safety

The base adhesives in this medical product have been tested in accordance with ISO 10993 and found to be non-cytotoxic and non-irritating.

Recommended Storage Conditions: 40-60% Humidity, 60°F-80°F

The information presented herein was prepared at VYBOND GROUP, INC. (Vybond Group, Inc. 2320 Bowling Green Road, Franklin, KY 42134) by qualified technical personnel. To VYBOND'S knowledge, it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state, and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which VYBOND assumes any legal responsibility.