


# 732-20

## Window & Door Flashing Tape

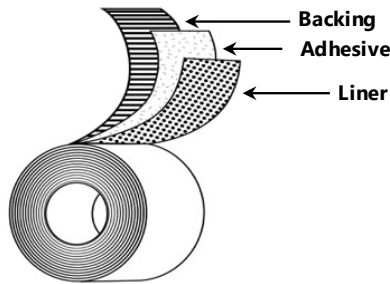

**Backing:** Woven Polyethylene (printed and not printed)

**Adhesive:** Butyl Rubber

**Liner:** Paper

**Colors:** Black Printed, White

**Specifications:** AAMA 711-13

**Standard Sizes:** 4in x 75ft, 6in x 75ft, 9in x 75ft, 12in x 75ft

### Applications

- Window & door installations
- Corner board abutments
- Sidewall sheathing seams
- Deck-to-wall joints
- Sealing other detail areas against water and air penetration

### Features

- Woven Polyethylene Backing
- Butyl Rubber Adhesive
- Paper Release Liner

### Benefits

- Conformable and durable
- Excellent air and moisture barrier properties
- Won't pucker or wrinkle in high temperatures
- Provides permanent weather-tight seal on most clean, dry building surfaces
- Excellent all-temperature performance
- Compatible with sealants & caulking
- Suitable for up to 1 year of outdoor UV exposure
- Self-healing after puncture
- Easy to remove

### Physical Properties

	Standard UOM	Metric UOM	Test Method
<b>Total Thickness</b>	20 mils	0.508 mm	ASTM D-1000
<b>Adhesion to Plywood</b>	26 oz/in	2.80 N/cm	ASTM D3330 Method F
<b>Adhesion to OSB</b>	30 oz/in	3.33 N/cm	ASTM D3330 Method F
<b>Adhesion to PVC</b>	101 lb/in	11.03 N/cm	ASTM D3330 Method F
<b>Adhesion to Aluminum</b>	123 oz/in	13.48 N/cm	ASTM D3330 Method F
<b>Tensile Strength</b>	50 lb/in	87.56 N/cm	ASTM D-3759
<b>Installation Temperature</b>	30 - 150° F	-11 - 65° C	
<b>Operating Temperature</b>	-30 - 200° F	-33 - 93° C	

Recommended Storage Conditions: 40-60% Humidity, 60°F-80°F  
Standard Shelf Life (at 25C): 36 months from date of manufacture.

The information presented herein was prepared at VYBOND GROUP, INC. (Vybond Group, Inc. 2320 Bowling Green Road, Franklin, KY 42134) by qualified technical personnel. To VYBOND'S knowledge, it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state, and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which VYBOND assumes any legal responsibility.