


797-50

Contour™ Stretchable Flashing Tape

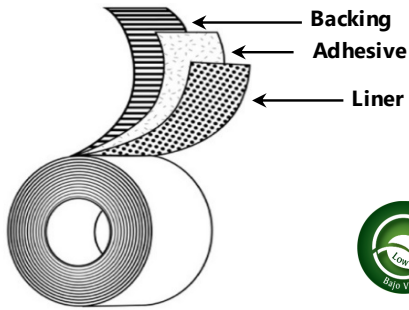

Backing: Creped, Cross-Laminated Polyolefin Film (printed and unprinted)

Adhesive: Butyl Rubber

Liner: Paper

Colors: Gray, White

Standard Sizes: 6in x 75ft, 9in x 75ft, 8in x 75ft

Applications

- Flashing around window sills, interior corners of recessed windows, round-top windows, and arched doorways.
- Sealing above-grade critical areas that need protection against air and water penetration.

Features

- Creped Polyolefin Backing
- Butyl Rubber Adhesive
- Paper Release Liner

Benefits

- Stretches more than double to conform to curves and corners
- Eliminates the need for corner flashing patches at window sides
- Excellent bond to plywood, OSB, housewrap and other common building materials
- Excellent all-temperature performance
- Compatible with sealants and caulking
- Suitable for up to 1 year of outdoor UV exposure
- Easy to remove

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Total Thickness	50.0 mils	1.270 mm	ASTM D-1000
Adhesion to Plywood	27 oz/in	2.95 N/cm	ASTM D3330 Method F
Adhesion to OSB	29 oz/in	3.15 N/cm	ASTM D3330 Method F
Adhesion to PVC	101 oz/in	11.03 N/cm	ASTM D3330 Method F
Adhesion to Aluminum	112 lb/in	12.25 N/cm	ASTM D3330 Method F
Tensile Strength	21 psi	36.77 N/cm	ASTM D3759
Elongation	80%		
AAMA Installation Temperature	30 to 180 °F	-1 to 82 °C	
Operating Temperature	-30 to 200 °F	-34 to 93 °C	

Recommended Storage Conditions: 60-80 °F at 40-60% RH

Standard Shelf Life (at 25 °C): 36 months from date of manufacture.

The information presented herein was prepared at VYBOND GROUP, INC. (Vybond Group, Inc. 2320 Bowling Green Road, Franklin, KY 42134) by qualified technical personnel. To VYBOND'S knowledge, it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state, and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which VYBOND assumes any legal responsibility.



2320 Bowling Green Road | Franklin, KY 42134
1-800-343-7878 Fax 1-800-328-4822

www.vybond.com

1/20/26