


POLYKEN®

626-20

Foilastic™ Window & Door Flashing Tape

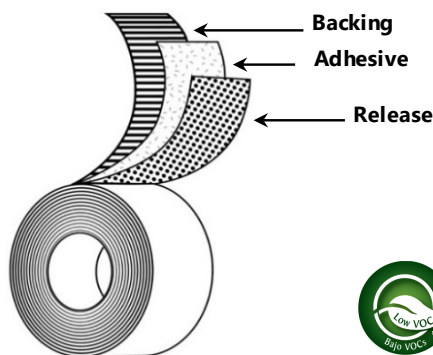

- Backing:** 2 mil Aluminum Foil - Printed
- Adhesive:** Butyl Rubber
- Liner:** White Kraft Paper
- Colors:** Aluminum
- Specifications:** AMMA 711-13, ASTM E2112
15 Year Limited Warranty
- Standard Sizes:** 4in x 100ft, 6in x 100ft, 6in x 50ft

Applications

- Window and door installations
- Corner board abutments
- Sidewall sheathing seams
- Deck-to-wall joints
- Sealing other detail areas against water and air penetration

Features

- 2 mil Aluminum Foil Backing
- Premium Butyl Rubber Adhesive
- Kraft Paper Release Liner

Benefits

- Conformable and durable
- Excellent air and moisture barrier properties
- Suitable for indefinite outdoor UV exposure
- Provides permanent weather-tight seal on most clean, dry building surfaces
- Excellent all-temperature performance
- Compatible with sealants and caulking
- Self-healing after puncture
- Easy to remove

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Total Thickness	17.0 mils	0.432 mm	ASTM D-1000
Adhesion to Aluminum	99 oz/in	10.86 N/cm	ASTM D330 Method F
Adhesion to Plywood	40 oz/in	4.38 N/cm	ASTM D330 Method F
Adhesion to OSB	35 oz/in	3.85 N/cm	ASTM D330 Method F
Adhesion to PVC	102 oz/in	11.21 N/cm	ASTM D330 Method F
Tensile Strength	26 lb/in	45.53 N/cm	ASTM D3759
Installation Temperature	30 to 180 °F	-1 to 82 °C	
Operating Temperature	-30 to 200 °F	-34 to 93 °C	

Recommended Storage Conditions: 60-80 °F at 40-60% RH

Standard Shelf Life (at 25 °C): 36 months from date of manufacture.

The information presented herein was prepared at VYBOND GROUP, INC. (Vybond Group, Inc. 2320 Bowling Green Road, Franklin, KY 42134) by qualified technical personnel. To VYBOND'S knowledge, it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state, and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which VYBOND assumes any legal responsibility.



2320 Bowling Green Road | Franklin, KY 42134
1-800-343-7875 Fax 1-800-328-4822
www.vybond.com
3/16/25