




# M-Tak<sup>®</sup> 7434N

## Polyester Double-Coated Tape

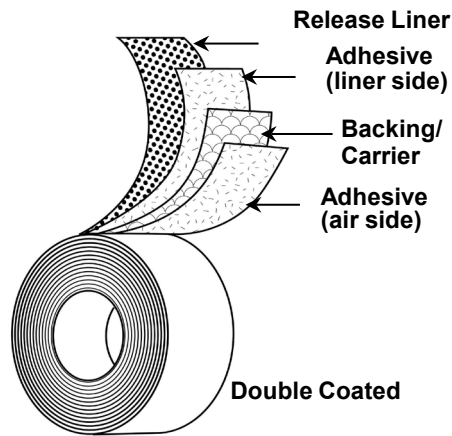

Carrier: Polyester Film  
Adhesive: Synthetic Rubber (HM805)  
Liner: 54# SC Kraft with Finger-Lift Edge<sup>™</sup>

### Product Constructions Available

Number	TW	TL	AW
7434N	1.25"	1000'	1.00"

### Applications

- Medium to heavy corrugated mailer sealing for high stress shipping applications

### Features

- Synthetic Rubber Adhesive
- PET Film Carrier
- Finger-lift Edge Liner

### Benefits

- High adhesion for a secure permanent bond to plastics, papers and mailers
- Strong initial tack
- Provides support & structure for added stability
- Conformable
- Easy to start, easy to use
- Extra-wide offset edge for easy removal

### Typical Test Values

	Standard UOM		Metric UOM		Test Method
Tape Thickness (w/o liner)	9.7	mils	0.246	mm	PSTC 133
Liner Thickness	3.2	mils	0.081	mm	PSTC 133
Overall Thickness	12.9	mils	0.328	mm	PSTC 133
Adhesion to Steel (Air Side)	160	oz/in	17.50	N/cm	PSTC 101 Mod
Adhesion to Steel (Liner Side)	165	oz/in	18.05	N/cm	PSTC 101 Mod
Application Temperature Range	45 to 120 °F		7 to 49 °C		
Operating Temperature Range	-20 to 170 °F		-29 to 77 °C		

The information presented herein was prepared at VYBOND GROUP, INC. (Vybond Group, Inc. 2320 Bowling Green Road, Franklin, KY 42134) by qualified technical personnel. To VYBOND'S knowledge, it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state, and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability, fitness for a particular purpose, or representation of accuracy). VYBOND GROUP, INC. assumes no responsibility for any errors or omissions.

**Recommended Storage Conditions: 60-80°F at 40-60% RH**

**Standard Shelf Life (at 25 °C): 36 months from date of manufacture.**

2320 Bowling Green Road | Franklin, KY 42134

1-800-343-7875 Fax 1-800-328-4822

www.vybond.com

4/26/2021

