


High Performance Double-Coated Bonding Tape

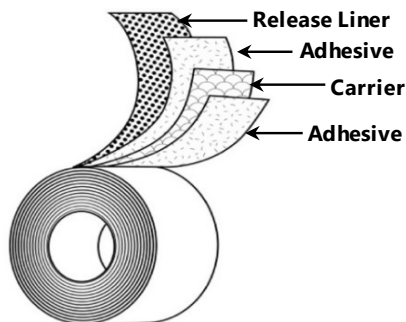

Carrier: PET Film
Adhesive: Cold weather Acrylic
Liner: Paper Liner
Colors: Natural (adhesive color)
Specifications: N/A
Standard Sizes: 48mm x 60yd, 12" x 60yd

Applications

- Bonding low surface energy materials
- Laminating and frame mounting
- Corrugate and film splicing/manufacturing
- Paper converting
- Foil manufacturing

Features

- PET Carrier Film
- Acrylic Adhesive
- Low VOC Content
- Kraft Paper Release Liner

Benefits

- Tough and durable
- Aggressive bond - won't flag or lift
- Moisture resistant
- Excellent performance in elevated temperatures and high humidity conditions
- Low odor - bonds to materials indoors with less ventilation
- Die-cutable

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Total Thickness	6.0 mils	0.152 mm	ASTM D-1000
Adhesion to Steel	70 oz/in	7.7 N/cm	PSTC-101
Tensile Strength	35 lb/in	61 N/cm	ASTM D-1000
Operating Temperature	-58 to 302 °F	-50 to 150 °C	

Recommended Storage Conditions: 60-80 °F at 40-60% RH
 Standard Shelf Life (at 25 °C): 24 months from date of manufacture.

The information presented herein was prepared at BERRY GLOBAL, INC. by qualified technical personnel. To Berry Global's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which Berry Global assumes any legal responsibility.