

POLYKEN®

FASTFLOOR™ BALLROOM & VENUE FLOORING TAPE



Holds Carpets. Spares Floors.

Two-sided flooring tape with differential adhesives provides firm bite and clean release on specialty flooring.

Differential Bond System.

Engineered with two adhesives: heavy-duty hold for carpet backing and CleanTack™ for smooth release.

Protects existing floors.

Low-tack, air-side adhesive grips venue carpets and polished floors, with clean release.

One-step install.

Double-sided construction speeds up layout and teardown in convention halls and ballrooms.

Repositionable installation.

Adjusts to align carpet seams cleanly during setup before final application.


Field-tested brands.



DUAL-SURFACE CARPET BOND

FastFloor™ delivers secure, single-step event carpet installation. Built with two specialized adhesives on a cloth carrier, it grabs coarse carpet and peels away clean from venue floors.

Designed for ballrooms, convention halls, and tradeshow booth layouts, FastFloor keeps seams flat under heavy foot traffic and speeds up load-out teardown.

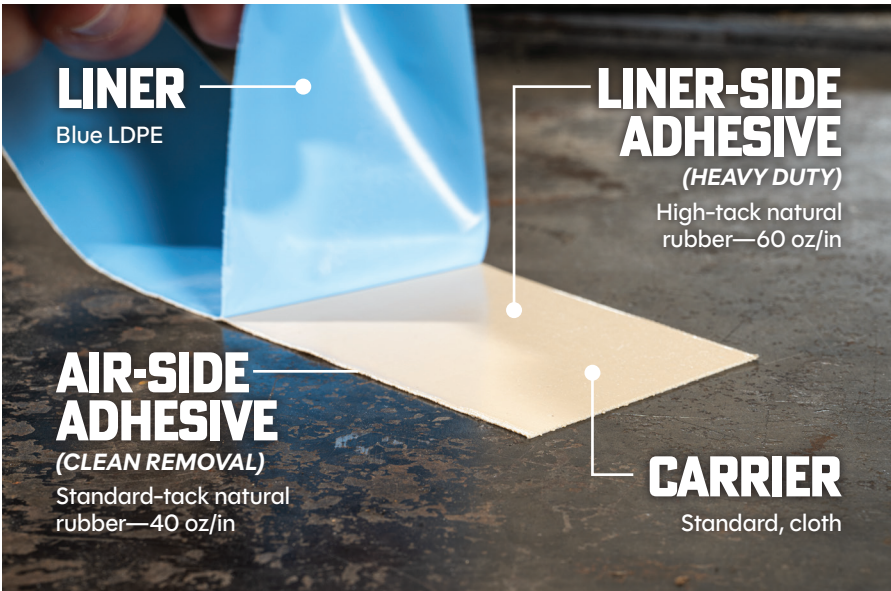

FEATURES	BENEFITS
Differential Rubber Adhesives (60 oz/in, 40 oz/in)	Dual adhesives provide high tack on one side and clean removal on the other.
11.0 mil (0.279 mm) Cloth Carrier	High shear strength resists bunching while remaining hand-tearable.
Repositionable Bond	Allows adjustments during seaming before placement.
Low VOC Content	Meets indoor air quality standards for enclosed spaces.
Blue LDPE Release Liner	Smooth release for fast and easy application.

SPECIFICATIONS	
Carrier	Cloth
Adhesive	Differential Rubber-Based
Liner	Blue LDPE Film
Total Thickness (ex. Liner)	11.0 mils (0.279 mm)
Adhesion to Steel (Air Side/Clean Removal)	40 oz/in (4.38 N/cm)
Adhesion to Steel (Liner Side/Heavy Duty)	60 oz/in (6.56 N/cm)
Tensile Strength	20 lb/in (35.03 N/cm)
Operating Temperature	35°F to 150°F (2°C to 65°C)
VOC Content	Low VOC (<1 g/L)
Standard Roll Sizes & Packaging	1.88 in x 25 yds (48 mm x 23 m) 24 rolls/case 3.78 in x 36 yds (96 mm x 33 m) 12 rolls/case



A field-tested brand from Vybond • vybond.com • 1237_08-26

The information presented herein was prepared at VYBOND GROUP, INC. (Vybond Group, Inc., 2320 Bowling Green Road, Franklin, KY 42134) by qualified technical personnel. To VYBOND's knowledge, it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use and that such use complies with all applicable federal, state, and local laws and regulations. The data are submitted only for the user's information and consideration and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose) or a representation for which VYBOND assumes any legal responsibility.