


# 3600A

## Double-Coated Tape

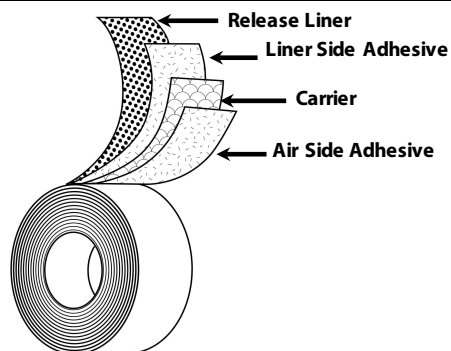

**Liner:** 60lb Silicone Coated Kraft

**Liner Side Adhesive:** Acrylic (I618)

**Backing/Carrier:** 0.5 mil polyester film

**Air Side Adhesive:** Acrylic (I618)

### Applications

- General purpose laminating for paper, felt, foam and plastic
- Assembly and fastening of components
- General purpose splicing applications

### Features

### Benefits

- |  |  |
|--|--|
| <ul style="list-style-type: none"> <li>• Polyester Film Carrier</li> <li>• Acrylic Adhesive</li> <li>• 60lb Silicone Coated Kraft Liner</li> </ul> | <ul style="list-style-type: none"> <li>• Support for aid in processing and application</li> <li>• Easily conforms to various surface types</li> <li>• High tack, medium peel adhesive</li> <li>• Bonds well to ABS, PC, LDPE, and HDPE</li> <li>• Easy to die cut and convert</li> </ul> |
|--|--|

### Typical Test Values

	Standard UOM	Metric UOM	Test Method
<b>Total Thickness w/liner</b>	6.3 mils	0.160 mm	PSTC 133
<b>Adhesive Thickness (Air Side)</b>	1.2 mils	0.030 mm	PSTC 133
<b>Carrier Thickness</b>	0.5 mils	0.013 mm	PSTC 133
<b>Adhesive Thickness (Liner Side)</b>	1.2 mils	0.030 mm	PSTC 133
<b>Liner Thickness</b>	3.4 mils	0.086 mm	PSTC 133
<b>Adhesion to Steel (Air Side)</b>	110 oz/in	12.03 N/cm	PSTC 101 Mod
<b>Adhesion to Steel (Liner Side)</b>	110 oz/in	12.03 N/cm	PSTC 101 Mod
<b>Shear Strength</b>	<24 Hours		
<b>Laminating Temperature</b>	50 to 150 °F	10 to 65 °C	
<b>Service Temperature</b>	-24 to 200 °F	-31 to 93 °C	

Recommended Storage Conditions: 40-60% Humidity, 60 °F - 80 °F

The information presented herein was prepared at VYBOND GROUP, INC. (Vybond Group, Inc. 2320 Bowling Green Road, Franklin, KY 42134) by qualified technical personnel. To VYBOND'S knowledge, it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state, and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which VYBOND assumes any legal responsibility.