


Double-Coated Foam Glazing Tape

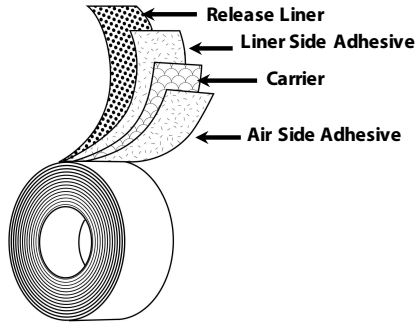

- Liner:** 4 mil Blue PP
- Liner Side Adhesive:** Acrylic (I636)
- Backing/Carrier:** 1/32" 6lb Closed-Cell, Crosslinked White (or Black) PE Foam
- Air Side Adhesive:** Acrylic (I636)
- Specifications:** AAMA 810.1-16 for expanded cellular glazing tape

Note: Same product is also available on **Black** color foam as **GTB-192**

Applications

- Seal window glass onto wood, aluminum, or plastic frames
- Provides cushioning to absorb vibration and shock
- Seals against air, moisture, light, and dust
- Thermal insulating and sound deadening

Features

- Acrylic Adhesive
- Foam Carrier
- PE Film Liner

Benefits

- Excellent quick stick
- Moderate shear strength
- Good UV resistance
- Conformable
- Minimal moisture absorption
- Lends itself to die-cutting and kiss cuts

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Overall Thickness (w/liner)	39.25 mils	0.997 mm	PSTC 133
Air-Side Adhesive Thickness	2.0 mils	0.051 mm	PSTC 133
Carrier Thickness	31.25 mils	0.794 mm	PSTC 133
Liner Side Adhesive Thickness	2.0 mils	0.051 mm	PSTC 133
Liner Thickness	4.0 mils	0.102 mm	PSTC 133
Adhesion to Steel (Air Side)	N/A*		PSTC 101 Mod
Shear Strength	>7 Days		PSTC 107 Mod
Laminating Temperature	68 to 100 °F	20 to 38 °C	
Service Temperature	-30 to 220 °F	-34 to 104 °C	

*Adhesive peel strength supercedes cohesive strength of the foam carrier.

Recommended Storage Conditions: 40-60% Humidity, 60 °F - 80 °F

Standard Shelf Life: 12 months from date of shipment

The information presented herein was prepared at VYBOND GROUP, INC. (Vybond Group, Inc. 2320 Bowling Green Road, Franklin, KY 42134) by qualified technical personnel. To VYBOND'S knowledge, it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state, and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which VYBOND assumes any legal responsibility.