


## Premium Grade Duct Tape

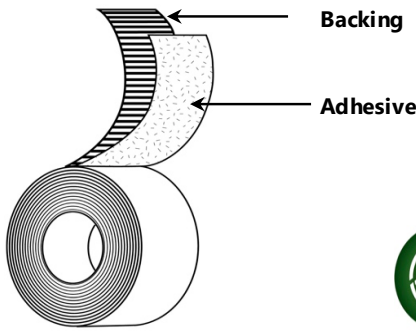

- Backing:** PE Coated Cloth
- Adhesive:** Rubber
- Liner:** N/A
- Colors:** Silver, Black, Olive Drab
- Specifications:** Tested in accordance with UL 723
- Standard Sizes:** 48mm x 55m, 72mm x 55m

### Applications

- Heavy-duty repair and maintenance
- Duct and vent sealing applications
- Waterproof packaging
- Media-blast protection

### Features

- PE-Coated Cloth Backing
- Natural Rubber Adhesive
- Low VOC Content

### Benefits

- Smooth, consistent unwind
- Moisture, chemical, and abrasion resistance
- High adhesion and excellent holding power
- Long-term moisture resistant bonds
- Can contribute toward satisfying EQ Credit 4.1 (Low Emitting Materials) under LEED<sup>®</sup>

### Typical Test Values

	Standard UOM	Metric UOM	Test Method
<b>Total Thickness</b>	12.0 mils	0.305 mm	ASTM D-1000
<b>Adhesion to Steel</b>	100 oz/in	70.61 N/cm	PSTC-101
<b>Tensile Strength</b>	24 lb/in	271.16 N/cm	ASTM D-1000
<b>Operating Temperature</b>	40 to 200 °F	4 to 93 °C	
<b>VOC Content</b>	<1 g/L		

Recommended Storage Conditions: 60-80 °F at 40-60% RH  
 Standard Shelf Life (at 25 °C): 36 months from date of manufacture.

The information presented herein was prepared at VYBOND GROUP, INC. (Vybond Group, Inc. 2320 Bowling Green Road, Franklin, KY 42134) by qualified technical personnel. To VYBOND'S knowledge, it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state, and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which VYBOND assumes any legal responsibility.