


## Shadowlastic® Plus - Window & Door Flashing Tape

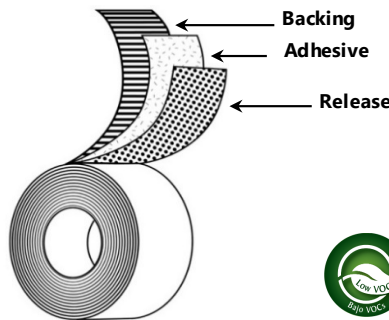

- Backing:** Woven Polyethylene (Printed)
- Adhesive:** Butyl Rubber
- Liner:** Kraft Paper Liner
- Colors:** Black (w/ White Print)
- Specifications:** AAMA-711-20, ASTM E2112  
15 Year Limited Warranty
- Standard Sizes:** 4in x 100ft, 6in x 100ft, 9in x 100ft, 12in x 100ft

### Applications

- Window and door installations
- Corner board abutments
- Sidewall sheathing seams
- Deck-to-wall joints
- Sealing other detail areas against water and air penetration

### Features

- Woven Polyethylene Backing
- Butyl Rubber Adhesive
- Paper Release Liner

### Benefits

- Conformable and durable
- Excellent air and moisture barrier properties
- Suitable for up to 3 years outdoor UV exposure
- Provides permanent weather-tight seal on most clean, dry building surfaces
- Good all-temperature performance
- Compatible with sealants and caulking
- Self-healing after puncture
- Used properly, can contribute toward requirements for EA Credit 1 (Optimize Energy Performance) under LEED®
- Easy to remove

### Typical Test Values

	Standard UOM	Metric UOM	Test Method
<b>Total Thickness</b>	19.0 mils	0.483 mm	ASTM D-1000
<b>Adhesion to Aluminum</b>	126 oz/in	13.83 N/cm	ASTM D3330 Method F
<b>Adhesion to Plywood</b>	122 oz/in	13.31 N/cm	ASTM D3330 Method F
<b>Adhesion to OSB</b>	74 oz/in	8.06 N/cm	ASTM D3330 Method F
<b>Adhesion to PVC</b>	132 oz/in	14.53 N/cm	ASTM D3330 Method F
<b>Adhesion to Backing</b>	136 oz/in	14.89 N/cm	ASTM D3330 Method F
<b>Tensile Strength</b>	52 lb/in	90.50 N/cm	ASTM D3759 Procedure A
<b>Installation Temperature</b>	30 to 180 °F	-1 to 82 °C	
<b>Operating Temperature</b>	-30 to 200 °F	-34 to 93 °C	

Recommended Storage Conditions: 60-80 °F at 40-60% RH

Standard Shelf Life (at 25 °C): 36 months from date of manufacture.

The information presented herein was prepared at VYBOND GROUP, INC. (Vybond Group, Inc. 2320 Bowling Green Road, Franklin, KY 42134) by qualified technical personnel. To VYBOND'S knowledge, it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state, and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which VYBOND assumes any legal responsibility.