


## Cooler Repair Tape

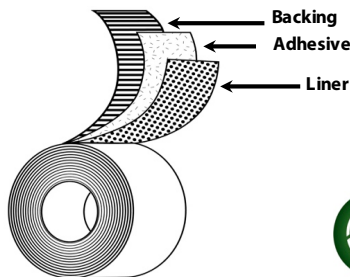

<b>Backing:</b>	Embossed Foil Laminate
<b>Adhesive:</b>	Acrylic
<b>Liner:</b>	White Kraft Paper
<b>Colors:</b>	Silver (Alu), White
<b>Specifications:</b>	Tested in accordance with UL723
<b>Standard Sizes:</b>	4" x 15yd

### Applications

- Seals seams, cracks, and corners against air leakage for walk-in refrigeration units, refrigerated display cases and trailers, industrial coolers, and more
- Sealing and patching insulation cladding and jacketing

### Features

- Embossed Foil Laminate Backing
- All Temperature Acrylic Adhesive
- Tested in accordance with UL 723
- Low VOC Content

### Benefits

- Excellent conformability
- Resists UV, MOLD, and MOISTURE
- Zero permeability - provides a superior vapor barrier
- TOUGH! High strength to resist tear and puncture
- Withstands very cold and very hot application and operating conditions
- Excellent quick stick for an instant seal
- Meets flammability and safety requirements for use in refrigeration appliances
- Can contribute toward satisfying EQ Credit 4.1 (Low Emitting Materials) under LEED®

### Typical Test Values

	Standard UOM	Metric UOM	Test Method
<b>Total Thickness</b>	10.2 mils	0.259 mm	PSTC-133
<b>Adhesion to Steel</b>	100 oz/in	10.94 N/cm	PSTC-101
<b>Adhesion to Backing</b>	80 oz/in	8.75 N/cm	PSTC-101
<b>Shear Strength</b>	>72 hours		PSTC-107 @ 2.2 PSI
<b>Tensile Strength</b>	70 lb/in	122.59 N/cm	PSTC-131
<b>Permeance</b>	0.0 perms		ASTM E-96
<b>Puncture Resistance</b>	43 lb	191 N	ASTM D-1000
<b>Operating Temperature</b>	-30 to 270 °F	-34 to 132 °C	
<b>Application Temperature</b>	-25 to 248 °F	-32 to 120 °C	
<b>VOC Content</b>	< 30 g/L		

Recommended Storage Conditions: 60 - 80 °F at 40-60% RH  
 Standard Shelf Life (at 25C): 12 months from date of manufacture.

The information presented herein was prepared at VYBOND GROUP, INC. (Vybond Group, Inc. 2320 Bowling Green Road, Franklin, KY 42134) by qualified technical personnel. To VYBOND'S knowledge, it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state, and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which VYBOND assumes any legal responsibility.