


Multi-Purpose Duct Tape

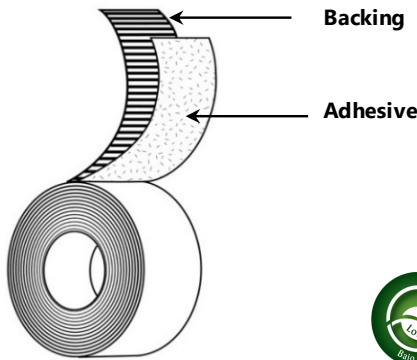

- Backing:** PE Coated Cloth
- Adhesive:** Rubber
- Liner:** N/A
- Colors:** Silver, Black, Red, White, OD, Blue, Green, Brown, Tan, Yellow, Burgundy
- Specifications:** Tested in accordance with UL 723
- Standard Sizes:** 48mm x 55m, 72mm x 55m

Applications

- General purpose packaging and repair
- Temporary holding
- Color coding
- Seaming and sealing PE sheeting

Features

- PE-Coated Cloth Backing
- Natural Rubber Based Adhesive
- Low VOC Content

Benefits

- Good balance of tensile strength and tearability
- Conformable and moisture resistant
- Good adhesion to a variety of surfaces
- Can contribute toward satisfying EQ Credit 4.1 (Low Emitting Materials) under LEED®

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Total Thickness	9.0 mils	0.229 mm	ASTM D-1000
Adhesion to Steel	70 oz/in	7.70 N/cm	PSTC-101
Adhesion to Backing	30 oz/in	3.28 N/cm	PSTC-101
Tensile Strength	25 lb/in	43.80 N/cm	ASTM D-1000
Elongation	24%		ASTM D-1000
Operating Temperature	40 to 200 °F	4 to 93 °C	
VOC Content	<1 g/L		

Recommended Storage Conditions: 60-80 °F at 40-60% RH
 Standard Shelf Life (at 25 °C): 36 months from date of manufacture.

The information presented herein was prepared at VYBOND GROUP, INC. (Vybond Group, Inc. 2320 Bowling Green Road, Franklin, KY 42134) by qualified technical personnel. To VYBOND'S knowledge, it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state, and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which VYBOND assumes any legal responsibility.