


## Low-Surface Energy (LSE) Transfer Tape

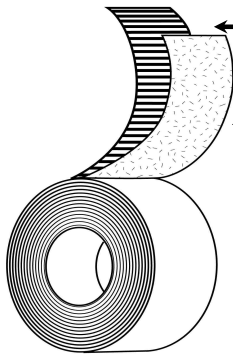

**Release Liner**

**Liner:**

74# Polycoated Kraft

**Adhesive**

**Adhesive:**

Acrylic (I626)

**Specifications:**

Passes Automotive Fogging Test: SAE J1756 @ 100 °C as tested

Passes Odor Test SAE J1351

Meets numerous other Auto Specs

### Applications

- Automotive interior attachments
- Glass to rear-view mirror
- Vibration and sound damping with fabrics and foams
- Wire and cable mounting
- Bonding to ABS, foil, film, TPO, TFPP, nylon, and glass

### Features

- Acrylic Adhesive
- 74# Kraft Liner

### Benefits

- Quick initial tack
- Low fogging, low flammability
- High peel and shear properties
- Excellent high and low temperature performance
- Conformable and good dimensional stability

### Typical Test Values

	Standard UOM	Metric UOM	Test Method
<b>Adhesive Thickness</b>	4.5 mils	0.114 mm	PSTC 133
<b>Liner Thickness</b>	5.5 mils	0.140 mm	PSTC 133
<b>Adhesion to Steel (24 hr dwell)</b>	58 oz/in	6.35 N/cm	PSTC 101 Mod - 1 mil PET
<b>Adhesion to Steel (24 hr dwell)</b>	180 oz/in	19.69 N/cm	PSTC 101 Mod - 2 mil Alu Foil
<b>Loop Tack</b>	140 oz/in	15.32 N/cm	PSTC 16
<b>Shear Strength</b>	>7 Days		PSTC 107 Mod
<b>Laminating Temperature</b>	68 to 100 °F	20 to 38 °C	
<b>Service Temperature</b>	-30 to 375 °F	-34 to 191 °C	

Recommended Storage Conditions: 40-60% Humidity, 60 °F - 80 °F

Standard Shelf Life: 12 months from date of shipment

The information presented herein was prepared at VYBOND GROUP, INC. (Vybond Group, Inc. 2320 Bowling Green Road, Franklin, KY 42134) by qualified technical personnel. To VYBOND'S knowledge, it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state, and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which VYBOND assumes any legal responsibility.