


5565FR

Removable Polyethylene Film Tape

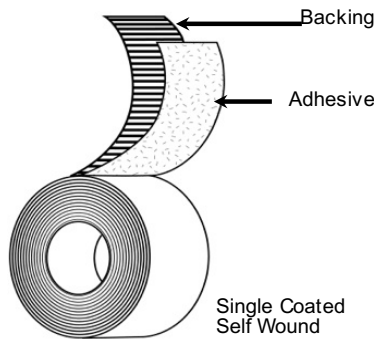

Backing:	LDPE Film
Adhesive:	Acrylic
Liner:	N/A
Colors:	Clear, Transparent Orange
Specifications:	FAR 25.853(a)
Standard Sizes:	Incremental widths 1/4" - 54" x 108ft

Applications

- Aircraft general surface protection applications on various interior materials during maintenance and repair operations

Features

- LDPE Film
- Acrylic Adhesive

Benefits

- Thick and highly conformable
- Abrasion, solvent, and moisture resistant
- Perforated spacing available
- Solvent resistant
- Excellent high and low temperature performance
- Removes cleanly - will not leave residue on most surfaces*

Typical Test Values

	Standard UOM		Metric UOM		Test Method
Total Thickness	5.5	mils	0.140	mm	PSTC-133
Substrate Thickness	4.5	mils	0.114	mm	PSTC-133
Adhesion to Steel	12	oz/in	1.31	N/cm	ASTM D-3330
Tensile Strength	12	lb/in	21.02	N/cm	ASTM D-3759
Elongation	500%				
Application Temperature	50 to 120 °F		10 to 49 °C		
Operating Temperature	-40 to 190 °F		-40 to 88 °C		

Recommended Storage Conditions: 40-60% Humidity, 60 - 80 °F
Standard Shelf Life (at 25 °C): 12 months from shipment date

The information presented herein was prepared at VYBOND GROUP, INC. (Vybond Group, Inc. 2320 Bowling Green Road, Franklin, KY 42134) by qualified technical personnel. To VYBOND'S knowledge, it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state, and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which VYBOND assumes any legal responsibility.