


Premium Wire Harness Tape

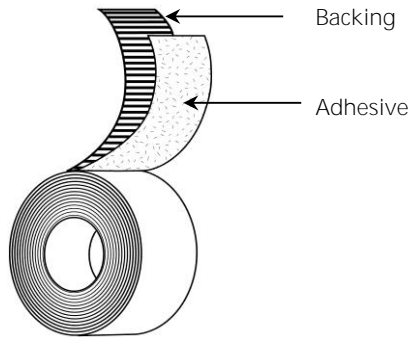

Backing: Polymeric Composite
 Adhesive: Gray Blended Rubber
 Temp. Resistance: 85 °C (continuous)
 Colors: Black
 Standard Sizes: 1.5in x 60yd, 48mm x 55m
 Specifications: Delphi Packard (GM) M0537
 FMVSS-302
 RoHS Compliant

Applications

- Wire harness and convolute splicing
- Waterproofing
- Permanent bonding and high performance applications

Features

- PE-Coated Cloth Backing
- Natural rubber based adhesive

Benefits

- Conforms well to irregular surfaces
- Resists twisting and curling
- High adhesion
- Moisture resistant
- Low VOC

Typical Test Values

	Standard UOM		Metric UOM		Test Method
Total Thickness	10.0	mils	0.254	mm	ASTM D-1000
Adhesion to Steel	46	oz/in	5.03	N/cm	PSTC-1
Adhesion to Backing	43	oz/in	4.70	N/cm	PSTC-1
Tensile Strength	23	lb/in	40.25	N/cm	ASTM D-1000
Elongation	12%				ASTM D-1000
Temperature Rating	85 °C				
Shelf Life at 25 °C	36 Months				

Recommended Storage Conditions: 40-60% Humidity, 60 °F - 80 °F

The information presented herein was prepared at VYBOND GROUP, INC. (Vybond Group, Inc. 2320 Bowling Green Road, Franklin, KY 42134) by qualified technical personnel. To VYBOND'S knowledge, it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state, and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which VYBOND assumes any legal responsibility.