


Self-Wound Acrylic Flashing Tape

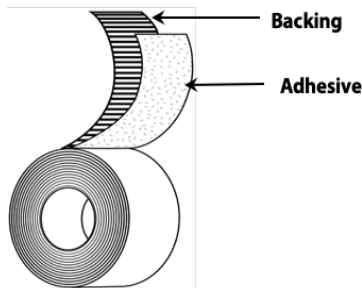

Backing:	Proprietary Flat Film Backing
Adhesive:	Cold Weather Acrylic Adhesive
Colors:	White, Black
Specification:	AAMA 711-22 for Self-Adhering Flashing Used for Installation of Exterior Wall Fenestration Products, ASTM D1970 nail seal
Standard Sizes:	4in x 75ft, 6in x 75ft

Applications

- Window and door installations
- Corner board abutments
- Side-wall sheathing seams
- Deck-to-wall joints
- Sealing other detail areas against water and air penetration

Features

- Flat Film Backing
- Acrylic Adhesive
- Self-Wound Construction

Benefits

- Strong and durable
- Excellent air and moisture barrier properties
- Excellent conformability for bonding around curves and corners
- Provides permanent weather-tight seal on most clean, dry building surfaces
- Excellent cold temperature adhesion
- Compatible with typical sealants and caulking
- Ease of use
- Less jobsite waste
- Suitable for up to 1 year of outdoor UV exposure

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Total Thickness w/o Liner	15.5 mils	0.394 mm	ASTM D-1000
Adhesion to OSB	59 oz/in	6.45 N/cm	ASTM D3330 Method F
Adhesion to Aluminum	181 oz/in	19.80 N/cm	ASTM D3330 Method F
Adhesion to Vinyl	162 oz/in	17.72 N/cm	ASTM D3330 Method F
Adhesion to Plywood	93 oz/in	10.17 N/cm	ASTM D3330 Method F
Adhesion to Backing	40 oz/in	4.38 N/cm	ASTM D3330 Method F
Tensile Strength (MD)	24 lb/in		ASTM D3759 Procedure A
Installation Temperature	20 to 176 °F	-7 to 80 °C	
Operating Temperature	-30 to 200 °F	-34 to 93 °C	

Recommended Storage Conditions: 60-80 °F at 40-60% RH

Standard Shelf Life (at 25 °C): 36 months from date of manufacture.

The information presented herein was prepared at VYBOND GROUP, INC. (Vybond Group, Inc. 2320 Bowling Green Road, Franklin, KY 42134) by qualified technical personnel. To VYBOND'S knowledge, it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state, and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which VYBOND assumes any legal responsibility.