


POLYKEN®

820 MEGAGRIP®

PERMANENT • WATERPROOF • VERSATILE

Permanent Waterproof Tape

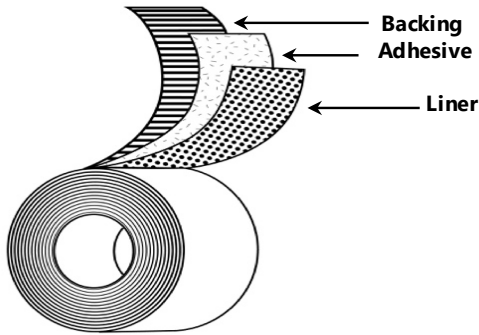

Backing: Polyethylene Film

Adhesive: Synthetic Rubber

Liner: PET Film Liner

Colors: Black, White

Specifications: N/A

Standard Sizes: 3in x 100ft, 4in x 100ft

Applications

- Secure/seal vapor barrier materials for concrete walls and floors
- Sealing heavy-duty floor covering and surface protection materials
- Waterproof patch and repair applications on sheet metal, aluminum, copper, PVC, plastic sheeting, tarps, pool liners, and more
- Waterproof bundling

Features

- Polyethylene Film Backing
- Rubber Adhesive
- PET Film Liner

Benefits

- Conformable and flexible
- Durable and tough
- Withstands outdoor exposure and moisture
- Low permeability
- Hand tearable
- Bonds to a variety of surfaces both under and out of water
- Remains pliable - doesn't dry, harden, or crack
- Forms permanent, water-tight bond
- Excellent all-temperature performance
- Easy to remove and use

Typical Test Values

	Standard UOM		Metric UOM		Test Method
Total Thickness	20.0	mils	0.508	mm	ASTM D-1000
Adhesion to Steel*	300	oz/in	32.8	N/cm	PSTC-101
Tensile Strength	10	lb/in	18	N/cm	ASTM D-1000
Permeance	0.10 US Perms				ASTM F1249
Installation Temperature	30 to 140 °F		-1 to 60 °C		
Operating Temperature	-30 to 165 °F		-34 to 74 °C		
Elongation	200%				

*Backing is reinforced with high tensile tape

Recommended Storage Conditions: 60-80 °F at 40-60% RH

Standard Shelf Life (at 25 °C): 24 months from date of manufacture.

The information presented herein was prepared at VYBOND GROUP, INC. (Vybond Group, Inc. 2320 Bowling Green Road, Franklin, KY 42134) by qualified technical personnel. To VYBOND'S knowledge, it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state, and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which VYBOND assumes any legal responsibility.



2320 Bowling Green Road | Franklin, KY 42134

1-800-343-7875 Fax 1-800-328-4822

www.vybond.com

6/17/25