


# POLYKEN®

# 105C

## Multi-Purpose Double-Coated Cloth Tape

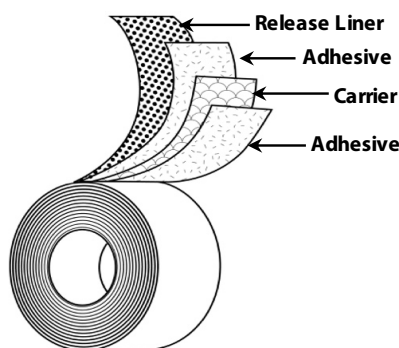

- Carrier:** Cloth
- Adhesive:** Rubber
- Liner:** Blue LDPE or Blue PP
- Colors:** Natural (adhesive color)
- Specifications:** Boeing BAC5034-4 Section 5.1.a(1)(a); BAC-5317 Rev F
- Standard Sizes:** 48mm x 23M, 48mm x 33M, 72mm x 23M

### Applications

- Carpet hold-down for the convention and entertainment industry
- Hanging, seaming, and splicing poly sheeting
- General mounting and holding

### Features

- Cloth reinforcement
- Natural rubber based adhesive
- Low VOC Content

### Benefits

- Good strength and elongation for easy tear, application and removal
- Conformable and moisture resistant
- Clean removal from most surfaces
- High tack and aggressive adhesion for a secure bond
- Can contribute toward satisfying EQ Credit 4.1 (Low Emitting Materials) under LEED®

### Typical Test Values

	Standard UOM	Metric UOM	Test Method
<b>Total Thickness</b>	11.0 mils	0.279 mm	ASTM D-1000
<b>Adhesion to Steel</b>	40 oz/in	4.38 N/cm	PSTC-101
<b>Tensile Strength</b>	20 lb/in	35.03 N/cm	ASTM D-1000
<b>Operating Temperature</b>	40 to 200 °F	4 to 93 °C	
<b>VOC Content</b>	<1 g/L		

Recommended Storage Conditions: 60-80 °F at 40-60% RH  
Standard Shelf Life (at 25 °C): 24 months from date of manufacture.

The information presented herein was prepared at VYBOND GROUP, INC. (Vybond Group, Inc. 2320 Bowling Green Road, Franklin, KY 42134) by qualified technical personnel. To VYBOND'S knowledge, it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state, and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which VYBOND assumes any legal responsibility.



2320 Bowling Green Road | Franklin, KY 42134  
1-800-343-7875 Fax 1-800-328-4822  
www.vybond.com  
5/6/20