


## Static Port Protection Tape

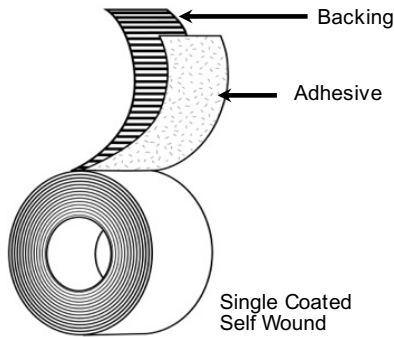

- Backing:** LDPE Film
- Adhesive:** Acrylic
- Liner:** N/A
- Colors:** Gloss Yellow, Orange, Red (Other Colors Available)
- Size Options:** Incremental widths 1/4" - 54" x 108ft  
Easy-Tear Version & Master Rolls Available

### Applications

- High visibility masking of critical static ports\*
- Color coding and part marking
- Temporary holding and sealing
- Temporary outdoor surface protection
- Temporary attachment and splicing of masking materials

### Features

- LDPE Film
- Acrylic Adhesive

### Benefits

- Conformable for irregular surfaces
- Withstands temporary outdoor exposure
- Excellent moisture barrier properties
- Resistant to citrus-based cleaners
- Solvent resistant - holds up to power washing
- UV Resistant (removes clean up to 28 days)
- Firm bond with virtually no edge bleed
- Will not crack or crease
- Excellent high and low temperature performance

### Typical Test Values

	Standard UOM		Metric UOM		Test Method
<b>Total Thickness</b>	5.5	mils	0.140	mm	PSTC-133
<b>Adhesion to Steel</b>	50	oz/in	5.47	N/cm	ASTM D-3330
<b>Tensile Strength</b>	11	lb/in	19.26	N/cm	ASTM D-3759
<b>Application Temperature</b>	50 to 120 °F		10 to 49 °C		
<b>Operating Temperature</b>	-40 to 190 °F		-40 to 88 °C		

**\* For best application results, use a squeegee to smooth down tape at the edges.**

Recommended Storage Conditions: 40-60% Humidity, 60 - 80 °F  
Standard Shelf Life (at 25 °C): 12 months from shipment date

The information presented herein was prepared at VYBOND GROUP, INC. (Vybond Group, Inc. 2320 Bowling Green Road, Franklin, KY 42134) by qualified technical personnel. To VYBOND'S knowledge, it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state, and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which VYBOND assumes any legal responsibility.