




M-Tak[®] OS 7435B

Polyester Double-Coated Tape

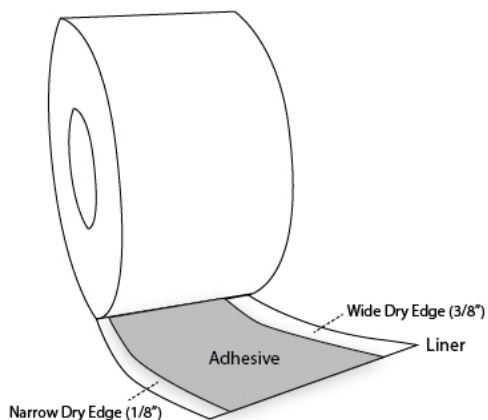

Carrier: Polyester Film
Adhesive: Synthetic Rubber (HM805)
Liner: 54# SC Kraft with Finger-Lift Edge™

Product Constructions Available

Number	TW	TL	AW
7435B	1.75"	1300'	1.25" Offset - Side B

Applications

- Medium to heavy corrugated mailer sealing for high stress shipping applications

Features

- Synthetic Rubber Adhesive
- PET Film Carrier
- Finger-lift Edge Liner

Benefits

- High adhesion for a secure permanent bond to plastics, papers and mailers
- Strong initial tack
- Provides support and structure for added stability
- Conformable
- Easy to start, easy to use
- Extra-wide offset edge for easy removal

Typical Test Values

	Standard UOM		Metric UOM		Test Method
Tape Thickness (w/o liner)	9.7	mils	0.246	mm	PSTC 133
Liner Thickness	3.2	mils	0.081	mm	PSTC 133
Overall Thickness	12.9	mils	0.328	mm	PSTC 133
Adhesion to Steel (Air Side)	160	oz/in	17.50	N/cm	PSTC 101Mod
Adhesion to Steel (Liner Side)	165	oz/in	18.05	N/cm	PSTC 101 Mod
Application Temperature Range	45 to 120 °F		7 to 49 °C		
Operating Temperature Range	-20 to 170 °F		-29 to 77 °C		

Recommended Storage Conditions: 60-80 °F at 40-60% RH
Standard Shelf Life (at 25 °C): 36 months from date of manufacture.

The information presented herein was prepared at VYBOND GROUP, INC. (Vybond Group, Inc. 2320 Bowling Green Road, Franklin, KY 42134) by qualified technical personnel. To VYBOND'S knowledge, it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state, and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which VYBOND assumes any legal responsibility.



2320 Bowling Green Road | Franklin, KY 42134
1-800-343-7875 Fax 1-800-328-4822
www.vybond.com
9/26/17