


Flame Retardant Wire Harness Tape

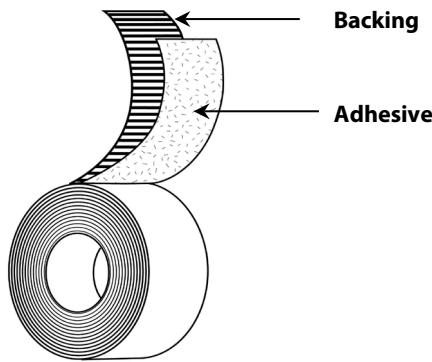

Backing: Polymeric Composite
Adhesive: Black Blended Rubber
Temp. Resistance: 125 °C (continuous), 150 °C (intermittent)

Colors: Black
Standard Sizes: 3/4" x 100ft
Specifications: Ford Perf. ES-AC3T-1A303-AA (C10-00)
 FMVSS-302
 RoHS Compliant

Applications

- Automotive engine compartment harness wrap
- High tensile, high performance applications
- Spot taping, clip retention or continuous wrap

Features

- Composite Backing
- Rubber adhesive
- Flame retardant

Benefits

- Easy tear
- Excellent conformability for wrapping
- High strength
- Low noise
- Resistant to typical automotive fluids
- Low VOC
- Meets FMVSS-302 requirements

Typical Test Values

	Standard UOM		Metric UOM		Test Method
Total Thickness	7.5	mils	0.191	mm	ASTM D-1000
Adhesion to Steel	53	oz/in	5.80	N/cm	PSTC-1
Adhesion to Backing	35	oz/in	3.83	N/cm	PSTC-1
Tensile Strength	34	lb/in	59.54	N/cm	ASTM D-1000
Unwind Force	48	oz/in	5.25	N/cm	PSTC-8
Resistance to Typical Auto Fluids					
Room Temperature	Pass				
Elevated Temperatures	Pass				
Flame Resistance	Self Extinguishing				ISO-3795
Temperature Rating	125 °C				
Shelf Life at 25 °C	24 Months				

Recommended Storage Conditions: 40-60% Humidity, 60 °F - 80 °F



2320 Bowling Green Road | Franklin, KY 42134
 1-800-343-7875 Fax 1-800-328-4822
 www.vybond.com
 2/2/2021