


Butyl Road Marking Tape

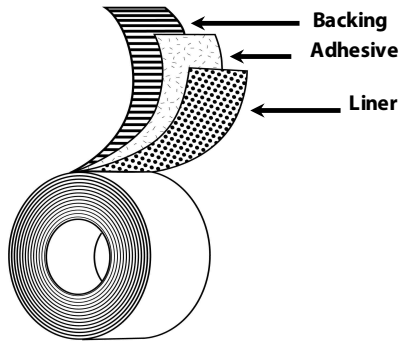

- Backing:** Polyethylene Film
- Adhesive:** Butyl Rubber
- Liner:** LDPE
- Colors:** Black
- Specifications:** N/A
- Standard Sizes:** 4" x 75Ft, 6" x 75Ft

Applications

- Secure traffic counters roadways
- Securing objects such as cords and safety markers to rough asphalt and concrete surfaces

Features

- Polyethylene Film Backing
- Butyl Rubber Adhesive

Benefits

- Conformable and flexible
- Excellent durability & solvent resistance
- Withstands outdoor exposure and moisture
- Aggressive bond to rough asphalt and concrete

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Total Thickness	55.0 mils	1.397 mm	ASTM D-1000
Adhesion to Steel	120 oz/in	13.13 N/cm	PSTC-101
Tensile Strength	38 lb/in	66.55 N/cm	ASTM D-1000
Operating Temperature	10 to 140 °F	-12 to 60 °C	
Elongation	225%		

Recommended Storage Conditions: 60-80 °F at 40-60% RH
Standard Shelf Life (at 25 °C): 24 months from date of manufacture.

The information presented herein was prepared at BERRY GLOBAL, INC (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To BERRY's knowledge it is true and

The information presented herein was prepared at VYBOND GROUP, INC. (Vybond Group, Inc. 2320 Bowling Green Road, Franklin, KY 42134) by qualified technical personnel. To VYBOND'S knowledge, it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state, and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which VYBOND assumes any legal responsibility.