


Multi-Purpose Foil Tape

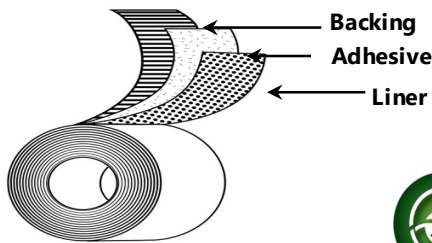

Backing: 2.0 mil Aluminum Foil
Adhesive: Synthetic Rubber
Liner: Unbleached Natural Kraft Paper
Colors: Aluminum
Specifications: UL 723 Classified
Standard Sizes: 48mm x 46M, 72mm x 46M

Applications

- Taping joints and seams in duct work for A/C, heating, and ventilation systems
- General purpose industrial and automotive uses
- Insulation seaming and patching

Features

- 2.0 mil Aluminum Foil Backing
- Synthetic Rubber Adhesive
- UL 723 Classified
- Low VOC Content

Benefits

- Conformable to fit corners and joints
- UV and moisture resistant
- Mold and mildew resistant
- Non-solvent for less odor and low VOC content
- Extreme high tack, aggressive bond to surfaces
- Good all-weather performance
- Meets flammability requirements for use in construction and marine applications
- Can contribute toward satisfying EQ Credit 4.1 (Low Emitting Materials) under LEED®

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Total Thickness	5.0 mils	0.127 mm	ASTM D-1000
Foil Thickness	2.0 mils	0.051 mm	ASTM D-1000
Adhesion to Steel	130 oz/in	14.22 N/cm	PSTC-101
Tensile Strength	22.5 lb/in	39.4 N/cm	ASTM D-1000
Operating Temperature	40 to 200 °F	4 to 93 °C	
Smoke Developed	15		
Flame Spread	10		
VOC Content	<1 g/L		

Recommended Storage Conditions: 60-80 °F at 40-60% RH

Standard Shelf Life (at 25 °C): 36 months from date of manufacture.

The information presented herein was prepared at VYBOND GROUP, INC. (Vybond Group, Inc. 2320 Bowling Green Road, Franklin, KY 42134) by qualified technical personnel. To VYBOND'S knowledge, it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state, and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which VYBOND assumes any legal responsibility.

2320 Bowling Green Road | Franklin, KY 42134

1-800-343-7875 Fax 1-800-328-4822

www.vybond.com

5/12/26