




1676-68

High Temp PVC Fineline Masking Tape

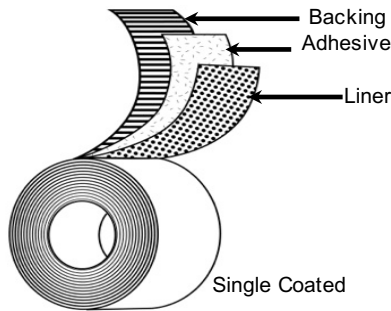

Backing:	PVC Film
Adhesive:	Rubber (R405)
Liner:	66# Clay Coated Kraft
Colors:	Light Blue (Low Gloss)
Specifications:	N/A
Size Options:	Incremental sizes 0.118" - 47.5" x 108Ft

Applications

- Masking color separations on plastic (TPO & RIM) automotive fascia, trim, and finished metals in high temp OEM bake cycles (280 °F for 45 min)*
- Aircraft paint operations
- OEM paint line powerwash cycles
- Clean room paint masking

Features

- PVC Film Backing
- Rubber Based Adhesive
- Clean-cut Plastic Core

Benefits

- Tough and conformable
- Translucent for easy application and inspection
- Moisture and solvent resistant
- Crisp, fineline edge
- Printable and die-cuttable
- Good high temperature performance
- Stain and ghosting resistant
- Recyclable and clean - no dust or contaminants

Typical Test Values

	Standard UOM		Metric UOM		Test Method
Total Thickness	5.5	mils	0.140	mm	PSTC-133
Substrate Thickness	4.0	mils	0.102	mm	PSTC-133
Adhesion to Steel	24	oz/in	2.63	N/cm	ASTM D-3330
Tensile Strength	16	lb/in	28.02	N/cm	ASTM D-3759
Elongation	110%				
Application Temperature	60 to 120 °F		16 to 49 °C		
Operating Temperature	40 to 280 °F		4.4 to 138 °C		

*Room temperature demask recommended

Recommended Storage Conditions: 40-60% Humidity, 60 - 80 °F

Standard Shelf Life (at 25 °C): 12 months from shipment date

The information presented herein was prepared at VYBOND GROUP, INC. (Vybond Group, Inc. 2320 Bowling Green Road, Franklin, KY 42134) by qualified technical personnel. To VYBOND'S knowledge, it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state, and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which VYBOND assumes any legal responsibility.



2320 Bowling Green Road | Franklin, KY 42134

1-800-343-7875 Fax 1-800-328-4822

www.vybond.com

8/9/18