


Acrylic Joist Tape

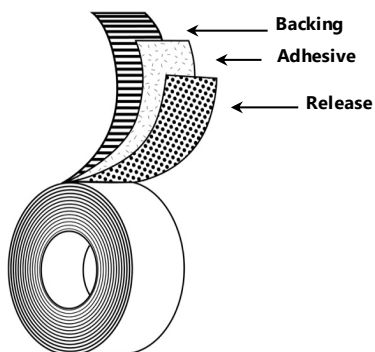

Backing:	Embossed Polypropylene
Adhesive:	Acrylic
Colors:	Black
Specification:	Passes AAMA 711-22 Section 5.2 Water Penetration Around Fasteners
Standard Sizes:	2in x 50ft, 4in x 50ft, 12in x 50ft

Applications

- Protect top of deck joists, rim boards and ledgers

Features

- Polypropylene Backing
- Acrylic Adhesive
- PET Film

Benefits

- Excellent conformability for bonding around curves and corners
- Embossed surface for increased traction
- Durable and strong
- Excellent cold-temperature adhesion
- Excellent adhesion to variety of substrates
- Provides permanent weather-tight seal on most clean, dry building surfaces
- Self-healing after puncture
- Easy to remove
- Tough and durable to prevent accidental tearing during installation
- Helps ensure consistent application

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Total Thickness	13.8 mils	0.351 mm	ASTM D-1000
Adhesion to OSB	59 oz/in	6.50 N/cm	ASTM D3330 Method F
Adhesion to Aluminum	158 oz/in	17.30 N/cm	ASTM D3330 Method F
Adhesion to Dry Pressure Treated Wood	133 oz/in	14.60 N/cm	ASTM D3330 Method F
Adhesion to Plywood	171 oz/in	18.70 N/cm	ASTM D3330 Method F
Adhesion to Backing	60 oz/in	6.60 N/cm	ASTM D3330 Method F
Tensile Strength	23 lb/in	40.28 N/cm	ASTM D-1000
Elongation	375%		ASTM D-1000
Installation Temperature	20 to 180 °F	-7 to 82 °C	
Operating Temperature	-30 to 200 °F	-34 to 93 °C	
UV Exposure	1 year		

Recommended Storage Conditions: 60-80 °F at 40-60% RH

Standard Shelf Life (at 25 °C): 36 months from date of manufacture.

The information presented herein was prepared at VYBOND GROUP, INC. (Vybond Group, Inc. 2320 Bowling Green Road, Franklin, KY 42134) by qualified technical personnel. To VYBOND'S knowledge, it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state, and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which VYBOND assumes any legal responsibility.