


Shadowlastic® Extreme - Window & Door Flashing Tape

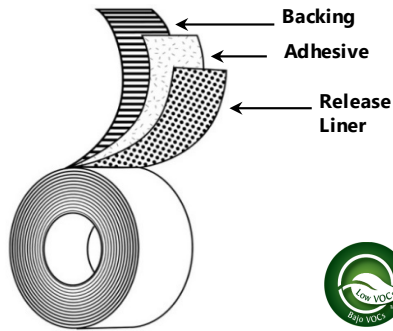

- Backing:** Woven Polyethylene (Printed and Unprinted)
- Adhesive:** Butyl Rubber
- Liner:** PET Film
- Colors:** White and Black
- Specifications:** AAMA 711-22, ASTM E2112
15 Year Limited Warranty
- Standard Sizes:** 4in x 75ft, 6in x 75ft, 9in x 75ft, 12in x 75ft

Applications

- Window and door installations
- Corner board abutments
- Side-wall sheathing seams
- Deck-to-wall joints
- Sealing other detail areas against water and air penetration

Features

- Woven Polyethylene Backing
- Butyl Rubber Adhesive
- PET Film

Benefits

- Conformable and durable
- Excellent air and moisture barrier properties
- Suitable for up to 3 years outdoor UV exposure
- Provides permanent weather-tight seal on most clean, dry building surfaces
- Excellent cold temperature adhesion
- Compatible with sealants and caulking
- Self-healing after puncture
- Used properly, can contribute toward requirements for EA Credit 1 (Optimize Energy Performance) under LEED®
- Easy to remove

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Total Thickness	14.5 mils	0.368 mm	ASTM D-1000
Adhesion to Aluminum	99 oz/in	10.86 N/cm	ASTM D3330 Procedure F
Adhesion to Plywood	117 oz/in	12.78 N/cm	ASTM D3330 Procedure F
Adhesion to OSB	104 oz/in	11.38 N/cm	ASTM D3330 Procedure F
Adhesion to PVC	94 oz/in	10.33 N/cm	ASTM D3330 Procedure F
Adhesion to Backing	118 oz/in	12.96 N/cm	ASTM D3330 Procedure F
Tensile Strength	50 lb/in	87.56 N/cm	ASTM D3759 Procedure F
Installation Temperature	10 to 180 °F	-12 to 82 °C	
Operating Temperature	-30 to 200 °F	-34 to 93 °C	

Recommended Storage Conditions: 60-80 °F at 40-60% RH
Standard Shelf Life (at 25 °C): 36 months from date of manufacture.

The information presented herein was prepared at BERRY GLOBAL, INC. by qualified technical personnel. To Berry Global's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which Berry Global assumes any legal responsibility.