


Premium High Temperature Splicing Tape

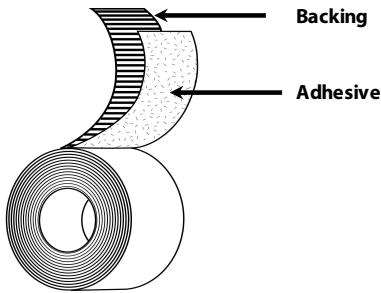

Backing: Untreated Polyester Film
Adhesive: Silicone
Liner: N/A
Colors: Blue, Red
Specifications: N/A
Standard Sizes: 2" x 72Yd, 3" x 72Yd

Applications

- Splicing low-surface energy materials
- Splicing coated or uncoated papers or corrugate
- Foil splicing
- Tape splicing/manufacturing

Features

- Polyester Film Backing
- Silicone Adhesive
- Self Wound Construction

Benefits

- Thin, low-profile film
- Excellent tensile strength and durability
- Blue for high visibility
- Outstanding adhesion to low-energy substrates
- Excellent shear strength for improved splice bond
- Performs well in extremely high temperatures
- No release liner for ease of use and less waste

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Total Thickness	2.8 mils	0.071 mm	ASTM D-1000
Adhesion to Steel	35 oz/in	3.83 N/cm	PSTC-101
Adhesion to Backing	25 oz/in	2.74 N/cm	PSTC-101
Tensile Strength	25 lb/in	43.78 N/cm	ASTM D-1000
Max Performance Temp	395 °F	202 °C	
Elongation	130%		

Recommended Storage Conditions: 60-80 °F at 40-60% RH
 Standard Shelf Life (at 25 °C): 24 months from date of manufacture.

The information presented herein was prepared at VYBOND GROUP, INC. (Vybond Group, Inc. 2320 Bowling Green Road, Franklin, KY 42134) by qualified technical personnel. To VYBOND'S knowledge, it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state, and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which VYBOND assumes any legal responsibility.